


BAUHAUS UP THERE

PIRRO CEILING & SYSTEM



WEVER & DUCRÉ
LIGHTING



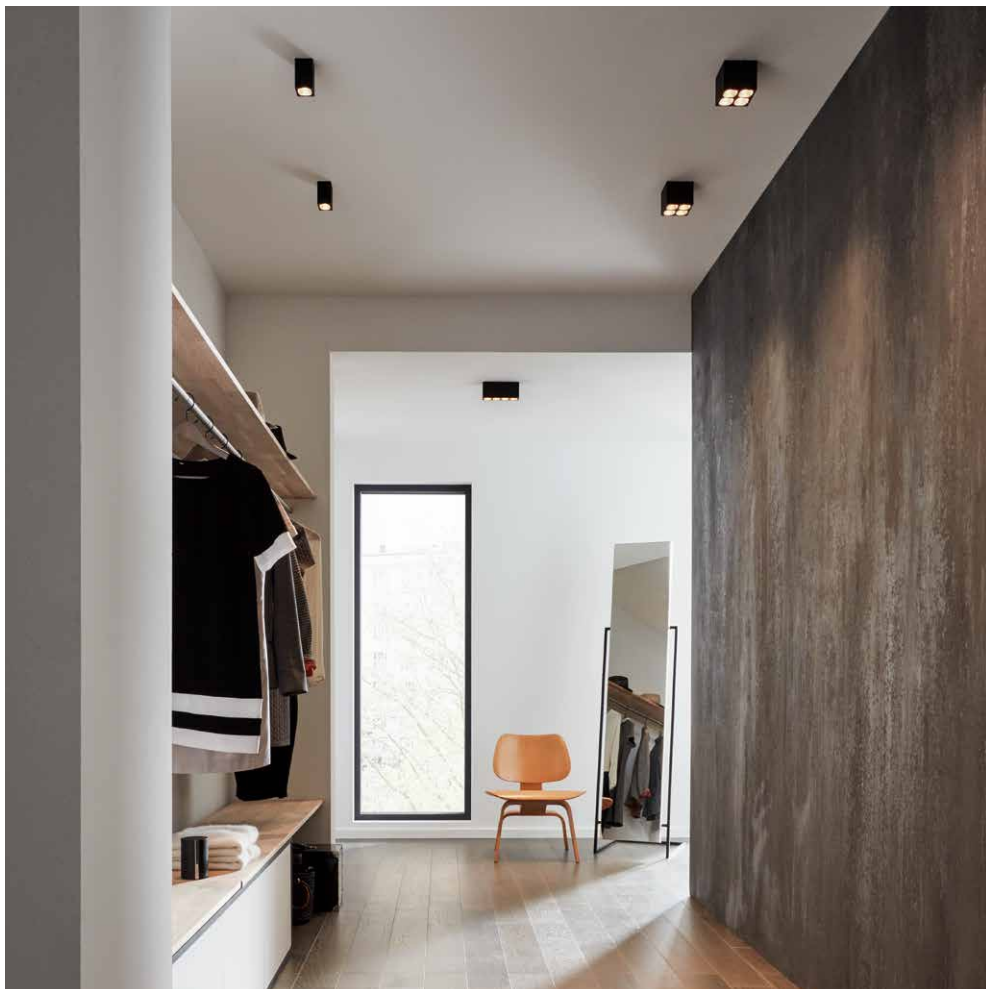

Variety

RECESSED



1.0



2.0



4.0



6.0

SURFACE SPOT



1.0



2.0



4.0



6.0

SURFACE SPOT



4.1

SURFACE OPAL



2.0




4.0


Create your PIRRO SYSTEM

CEILING BASE SURFACE

available in ● white, ● gold or ● black



1.0
755 mm



2.0
1150 mm

PIRRO OPAL OR SPOT INSETS

available in ● white/black, ● white/gold,
● black/gold or ● black



2.0
opal



4.0
opal



2.0
spot




4.0
spot




CREATE YOUR OWN DESIGN

some examples

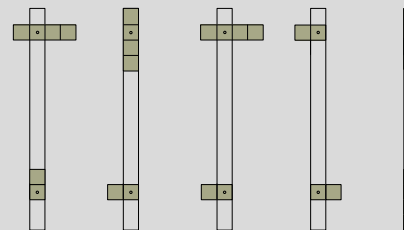

ceiling base 1.0 with insets

755 mm

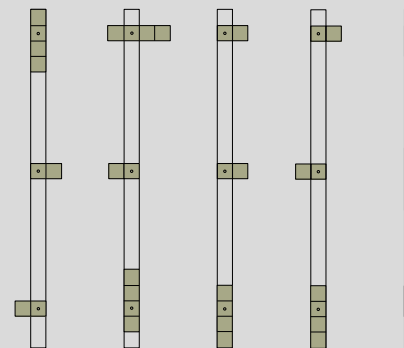






ceiling base 2.0 with insets

1150 mm

Tech Specifications


CEILING RECESSED | CEILING SURFACE OPAL

available in  white/black,  white/gold,  black/gold or  black




CEILING RECESSED 1.0

LED 4.5W | 500mA | 9V
2700K | 3000K
up to 405lm | CRI>90
aluminium powder coated
PC lens and reflector




CEILING RECESSED 2.0

2x LED 4.5W | 500mA | 18V total
2700K | 3000K
up to 2x405lm | CRI>90
aluminium powder coated
PC lens and reflector




CEILING RECESSED 4.0

4x LED 4.5W | 500mA | 36V total
2700K | 3000K
up to 4x405lm | CRI>90
aluminium powder coated
PC lens and reflector




CEILING SURFACE SPOT 1.0

LED 7W | 220-240VAC
50-60Hz | incl. PS phase-cut dim
2700K | 3000K | up to 405lm
CRI>90 | aluminium powder coated
PC lens and reflector




CEILING SURFACE SPOT 2.0

2x LED 5W | 220-240VAC
50-60Hz | incl. PS phase-cut dim
2700K | 3000K | up to 2x 405lm
CRI>90 | aluminium powder coated
PC lens and reflector




CEILING SURFACE SPOT 4.0

4x LED 5W | 220-240VAC
50-60Hz | incl. PS phase-cut dim
2700K | 3000K | up to 4x 405lm
CRI>90 | aluminium powder coated
PC lens and reflector




CEILING RECESSED 6.0

6x LED 4.5W | 500mA | 2x 27V total
2700K | 3000K
up to 6x405lm | CRI>90
aluminium powder coated
PC lens and reflector




CEILING SURFACE OPAL 2.0

LED 7W | 220-240VAC
50-60Hz | incl. PS phase-cut dim
2700K | 3000K | up to 260lm
CRI>90 | aluminium powder coated
opal PMMA cover




CEILING SURFACE OPAL 4.0

LED 12W | 220-240VAC
50-60Hz | incl. PS phase-cut dim
2700K | 3000K | up to 580lm
CRI>90 | aluminium powder coated
opal PMMA cover



CEILING SURFACE SPOT 4.1

4x LED 5W | 220-240VAC
50-60Hz | incl. PS phase-cut dim
2700K | 3000K | up to 4x 405lm
CRI>90 | aluminium powder coated
PC lens and reflector



CEILING SURFACE SPOT 6.0

6x LED 5W | 220-240VAC
50-60Hz | incl. PS phase-cut dim
2700K | 3000K | up to 6x 405lm
CRI>90 | aluminium powder coated
PC lens and reflector



MORE INFO

weverducre.com/pirro



Perfect angles

WE LOVE SHARP LINES

Especially when they look as great as they do on PIRRO. That's why the Bauhaus-style light is one of our absolute favourites. Both as an elegant recessed or surface-mounted version, and as a flexible track system. How does it work? Simply put together insets, whether SPOT or OPAL, individually and on the track and a small work of art is conjured onto the ceiling.



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design
PIRRO CEILING RECESSED