


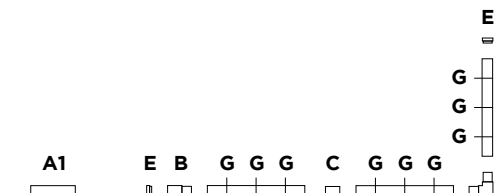


STREX SYSTEM

RECESSED | 48V DALI TRACKS

RECESSED EXAMPLES

configure your own STREX SYSTEM online at weverducre.com/strex-configurator



RECESSED

track 48V | 15A | DALI




	CODE
1.0m	90014187
1.0m	90014188
2.0m	90014189
2.0m	90014190
3.0m	90014191
3.0m	90014192

G | MOUNTING BRACKET

recessed mounting bracket




	CODE
_____	90014193
for 1.0m - 2pcs needed	
for 2.0m - 4pcs needed	
for 3.0m - 6pcs needed	



A1 | POWER SUPPLY

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed


	CODE
100W 48V	90218901
150W 48V	90218902
for DALI SELV solution see page 737	



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²


	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197




D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right


	CODE
	90014251
	90014252

for 4 corner O shape, refer to mounting
instructions or online configurator



E | END CAP

	CODE
	90014149
	90014150



F | WIRELESS CONTROL

5W | 2400-2483.5MHz | adapter for
DALI wireless management

	CODE
	90014194
	90014195



more on page 737 and
weverducre.com/strex-custom





Download the app for setup and
control to start dimming.

STREX SYSTEM

SURFACE | 48V DALI TRACKS

SURFACE EXAMPLES

configure your own STREX SYSTEM online at weverducre.com/strex-configurator

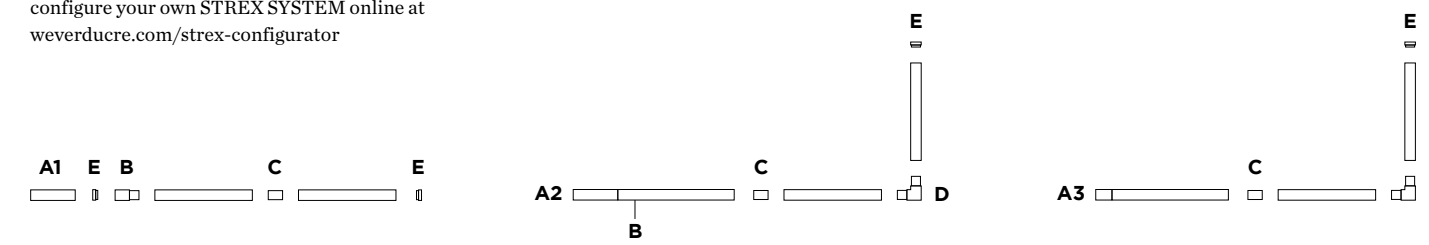


A1 | POWER SUPPLY

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

	CODE
100W 48V	90218901
150W 48V	90218902

for DALI SELV solution see page 737




SURFACE

track 48V | 15A | DALI


SELV

	CODE
1.0m	90014181
1.0m	90014182
2.0m	90014183
2.0m	90014184
3.0m	90014185
3.0m	90014186




A2 | POWER SUPPLY

profile converter box incl. PS
220-240VAC | 50-60Hz
48V | incl. DALI through wiring
for connection to power feed




	CODE
100W	90014166
100W	90014167
150W	90014170
150W	90014171




A3 | IN TRACK POWER SUPPLY

converter with in line connection box
including power feed | 220-240VAC
50-60Hz | 48V

	CODE
80W	90014176




	CODE
230W	90014177



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²


	CODE
	90014153
	90014154



F | WIRELESS CONTROL

5W | 2400-2483.5mHz | adapter for
DALI wireless management


	CODE
	90014194
	90014195



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197




D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014198
	90014199

for 4 corner O shape, refer to mounting
instructions or online configurator



E | END CAP

	CODE
	90014147
	90014148



Download the app for setup and
control to start dimming.





more on page 737 and
weverducre.com/strex-custom

STREX SYSTEM

SUSPENDED | 48V DALI TRACKS


SUSPENDED EXAMPLES

configure your own STREX SYSTEM online at weverducre.com/strex-configurator

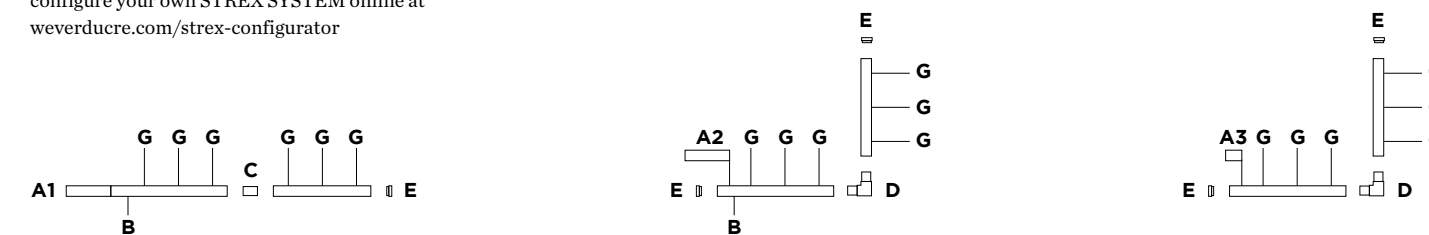


A1 | POWER SUPPLY

profile converter box incl. PS
220-240VAC | 50-60Hz | 48V | incl.
DALI through wiring for connection
to power feed | power supply in box,
suspended in line with profile




CODE	CODE
100W	90014260
100W	90014261
150W	90014262
150W	90014263




A2 | POWER SUPPLY

ceiling base incl. PS
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring
for connection to power feed




CODE	CODE
100W	90014168
100W	90014169
150W	90014172
150W	90014173




A3 | IN TRACK POWER SUPPLY

converter in track | including power
feed | 220-240VAC | 50-60Hz | 48V
incl. 3m power cable

CODE	CODE
80W	90014174




CODE	CODE
230W	90014175



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²


CODE	CODE
	90014153
	90014154



F | WIRELESS CONTROL

5W | 2400-2483.5mHz | adapter for
DALI wireless management

CODE	CODE
	90014194
	90014195




SUSPENDED

track 48V | 15A | DALI



CODE	CODE
1.0m	90014181
1.0m	90014182
2.0m	90014183
2.0m	90014184
3.0m	90014185
3.0m	90014186




SUSP. INDIRECT LIGHT

track 48V | 15A | DALI | with indirect
light | 3.0m suspension sets already
included



CODE	CODE	
2.0m	900140W	
2.0m	900140B	
LIGHT COLOUR	LUMEN CRI	CODE
3000K 28W	1900 >90	5
CODE	CODE	
3.0m	900141W	
3.0m	900141B	
LIGHT COLOUR	LUMEN CRI	CODE
3000K 42W	2850 >90	5




G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket | not
needed for indirect light version

CODE	CODE
stainless steel colour	
1.5m	90014160
3.0m	90014161
black colour	
1.5m	90014274
3.0m	90014275


for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

CODE	CODE
	90014196
	90014197




D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

CODE	CODE
	90014198
	90014199

for 4 corner O shape, refer to mounting
instructions or online configurator



E | END CAP

CODE	CODE
	90014147
	90014148



more on page 737 and
weverducre.com/strex-custom






Download the app for setup and
control to start dimming.

1-PHASE TRACKS

220-240V TRACKS | ACCESSORIES

RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq



TRACK PROFILE


recessed | 220-240V | 16A



	CODE
1.0m	90014118
1.0m	90014119
2.0m	90014120
2.0m	90014121
3.0m	90014122
3.0m	90014123

F | MOUNTING BRACKET

for recessed fixation



	CODE
	90014100
for 1.0m - 2pcs needed for 2.0m - 3pcs needed for 3.0m - 4pcs needed	

TRACK PROFILE

surface | suspended | 220-240V | 16A




	CODE
1.0m	90014001
1.0m	90014007
2.0m	90014002
2.0m	90014008
3.0m	90014003
3.0m	90014009

G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket


	CODE
1.5m	90014101
1.5m	90014102
3.0m	90014103
3.0m	90014104
for 1.0m - 2pcs needed for 2.0m - 3pcs needed for 3.0m - 4pcs needed	



A | END FEED

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014018
	90014019



A | END FEED

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014020
	90014021



B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037



C | END CAP LEFT/RIGHT


	CODE
	90014028
	90014029



D | L-FEED

can be used as feed and connector
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014024
	90014025



D | L-FEED

can be used as feed and connector
220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014026
	90014027



E | CONNECTOR

straight | 220-240V | 16A

	CODE
	90014022
	90014023



COVERPLATE END FEED

only use with recessed tracks

	CODE
	90014124
	90014125



more 1-phase track accessories on
page 738

3-PHASE TRACKS

220-240 VOLT TRACKS | ACCESSORIES

SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

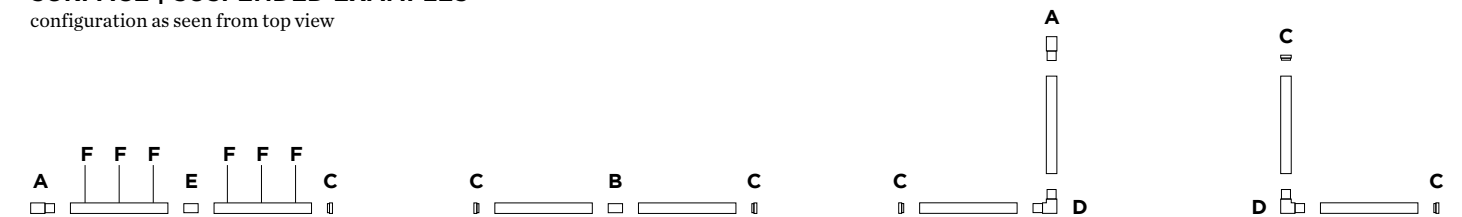


TRACK PROFILE

surface | suspended | 220-240V | 16A

⊕ FELV

	CODE
1.0m	90014200
1.0m	90014201
2.0m	90014202
2.0m	90014203
3.0m	90014204
3.0m	90014205




F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
1.5m	90014206
1.5m	90014207
3.0m	90014208
3.0m	90014209


for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014238
	90014239



A | END FEED

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014240
	90014241



B | MIDDLE FEED


straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014224
	90014225



C | END CAP LEFT/RIGHT


	CODE
	90014216
	90014217



D | L-FEED

220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014220
	90014221



D | L-FEED

220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014222
	90014223



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014226
	90014227



TRACK COVER

	CODE
1.0m	90014236
1.0m	90014237

more 3-phase track accessories on
page 739