WEVER & DUCRÉ LIGHTING

DEEP petit 1.0 Loxone

15356LW9


PROJECT

TYPE

NOTES


QUANTITY

DATE

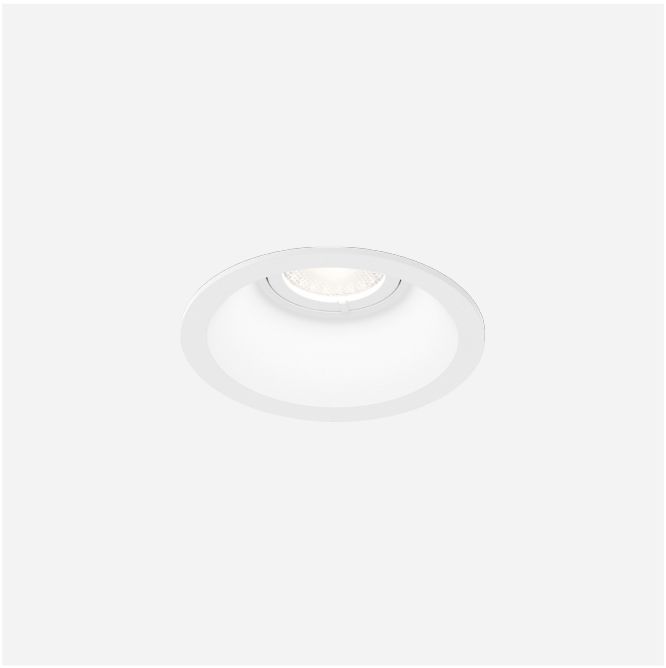



Round ceiling recessed downlight made from die-cast aluminium; surface White Matt; powder coated, matt texture; RAL 9010; installation without tools using wire springs; suitable for ceiling thickness of 4-23 mm; recessed depth 50mm; beam angle 39°; with COB (Chip on Board) technology for maximum efficiency; light colour 2000 - 3000 K colour warm dimming; CRI ≥ 90; degree of protection IP20; Class 3; IC rated; Loxone ready; fits into Kaiser ThermoX® 9320-11; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



LUMINAIRE

Ceiling
Recessed
White Matt
RAL 9010 [a]
IP20
IC rated
Interior
465 lm

LED MODULE

colour warm dimming
2000 - 3000 K
CRI ≥ 90
L70 / 50000h

OPTICAL

Medium (standard)
beam angle 39°

ELECTRICAL

Loxone
24 V
Class III

PHYSICAL

diameter 80 mm
height 45 mm
0.09 kg
wire springs

CUTOUT

diameter 68-70 mm
min. ceiling thickness 4 mm
max. ceiling thickness 23 mm
recessed depth 50 mm

[a] Colour may deviate slightly due to production conditions

['15356LW9'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com