WEVER & DUCRÉ LIGHTING

LITO 2.0 Loxone

1454ALW5


PROJECT

TYPE

NOTES


QUANTITY

DATE

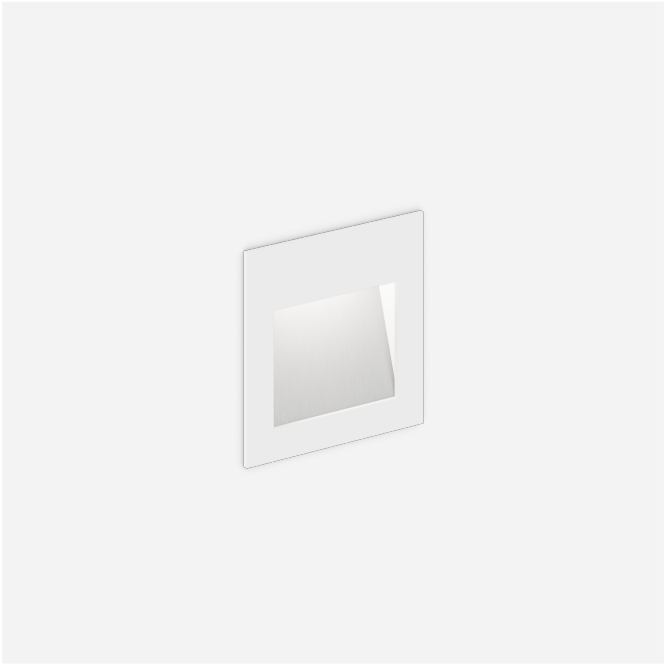



Square wall recessed luminaire made from aluminium; surface White Matt; powder coated; matt texture; RAL 9010; recessed depth 35mm; PCB; light colour 3000 K; CRI ≥ 90; degree of protection IP20; Class 3; Loxone ready; light source not replaceable;



LUMINAIRE

Wall
Recessed
White Matt
RAL 9010 [a]
IP20
Interior
115 lm

LED MODULE

3000 K
CRI ≥ 90
L80 / 80000 h

OPTICAL

Asymetric

ELECTRICAL

Loxone
24 V
Class III

PHYSICAL

length 80 mm
width 2 mm
height 80 mm
0.09 kg

CUTOUT

length 70 mm
width 70 mm
min. ceiling thickness 12 mm
recessed depth 35 mm

[a] Colour may deviate slightly due to production conditions

MOUNTING ACCESSORIES

PLASTERKIT

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
LITO Loxone			120·120·8	90017125

RECESSED HOUSING

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
LITO Loxone			120·38·120	90012054

['1454ALW5'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com