WEVER & DUCRÉ LIGHTING

STRIPE 2.2 Loxone

3056ALWA4


PROJECT

TYPE

NOTES


QUANTITY

DATE

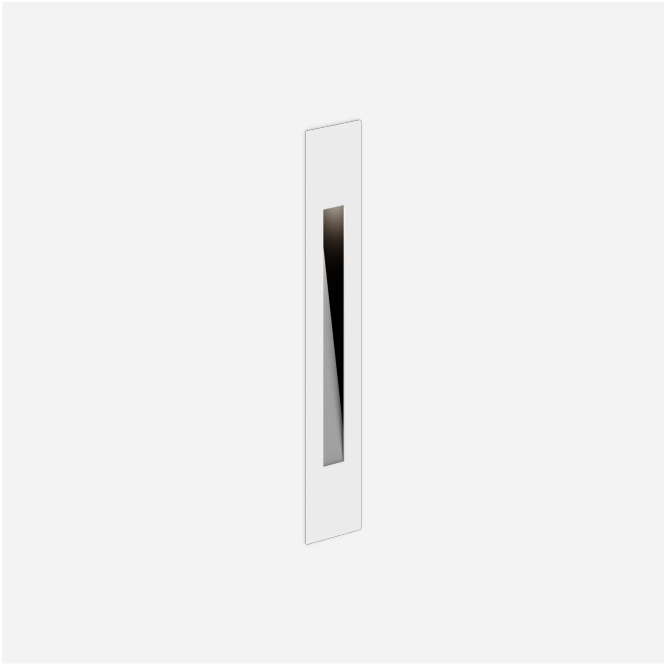



Rectangular wall recessed luminaire made from aluminium; surface White Matt; powder coated; matt texture; RAL 9010; recessed depth 40mm; suitable for wall thickness of 8-18mm; PCB; light colour 3000 K; CRI ≥ 80; degree of protection IP20; Class 3; Loxone ready; light source not replaceable;



LUMINAIRE

Wall
Recessed
White Matt
RAL 9010 [a]
IP20
Interior
36 lm

LED MODULE

3000 K
CRI ≥ 80
L70 / 60000h

OPTICAL

Asymetric

ELECTRICAL

Loxone
24 V
Class III

PHYSICAL

diameter 35 mm
height 220 mm
0.27 kg

CUTOUT

length 25 mm
width 170 mm
min. ceiling thickness 8 mm
max. ceiling thickness 18 mm
recessed depth 40 mm

[a] Colour may deviate slightly due to production conditions

['3056ALWA4'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com