




PROJECT

TYPE

NOTES

QUANTITY

DATE

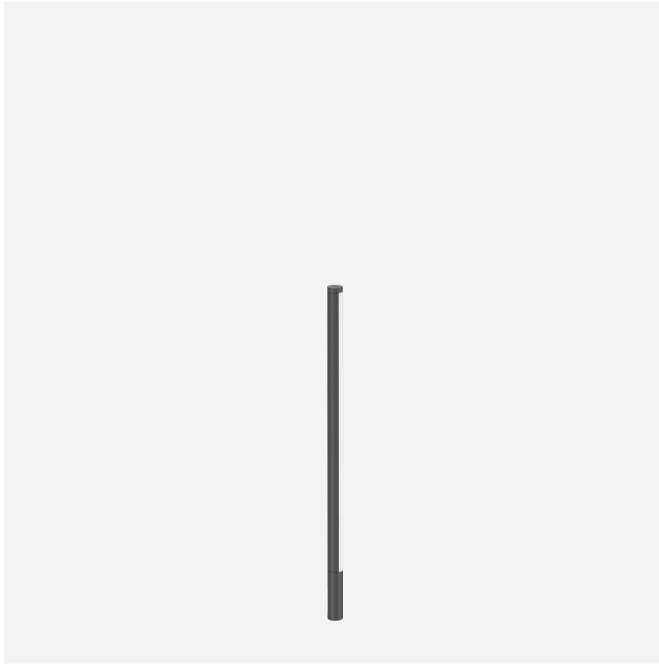

Floor surface mounted luminaire made from die-cast aluminium; surface Anthracite Grey; powder coated; matt texture; RAL 7016; opal PC cover; PCB 3-step binning; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; 24 V; degree of protection IP65; Class 3; Plug & Play connector system; driver not included; inclusive 2500mm cable; ground spike included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;

LUMINAIRE

Floor
Surface
Anthracite Grey
RAL 7016 ^a
IP65
Exterior
330 lm

LED Module

2700 K
CRI ≥ 90
L80 / 50000h
 ≤ 3 SDCM (initial MacAdam)

Optical

Opal
CIE flux code: 20 45 72 49 100



Electrical

24 V
Class III

Physical

diameter 20 mm
height 600 mm
0.36 kg

LIGHT DISTRIBUTION



[770182A3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.


Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.97	0.95	0.93	0.92
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF

MF Maintenance Factor

LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor

LLMF Lamp Lumens Maintenance Factor

LSF Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

ELECTRICAL ACCESSORIES
Plug & Play Driver

Type	Colour	Voltage	L·W·H (MM)	Item number
30W IP67		24V	118-35-26	90018014
75W IP67		24V	162,5-43-32	90018015
plug type L 50W 24V IP67		24V	110-63-32	C90018024
plug type L 100W 24V IP67		24V	153-63-32	C90018025
plug type B 50W 24V IP67		24V	110-63-32	L90018024
plug type B 100W 24V IP67		24V	153-63-32	L90018025

Plug & Play Driver CH

Type	Colour	Voltage	L·W·H (MM)	Item number
30W IP67		24V	150-48-31	90018016
60W IP67		24V	167-48-32	90018017

Plug & Play Driver UK

Type	Colour	Voltage	L·W·H (MM)	Item number
30W IP67		24V	150-48-31	90018018
60W IP67		24V	167-48-32	90018019

Plug & Play Extension Cable

Type	Colour	Voltage	Length (MM)	Item number
2,5 m IP67			2500	90014502
5 m IP67			5000	90014503
0.5 m IP67			500	90014505
1 m IP67			1000	90014506

Plug & Play Straight Connector

Type	Colour	Voltage	Length (MM)	Item number
			200	90014504

Plug & Play T-Connector

Type	Colour	Voltage	L·W·H (MM)	Item number
			48-24-15	90014501