




PROJECT

TYPE


NOTES

QUANTITY

DATE

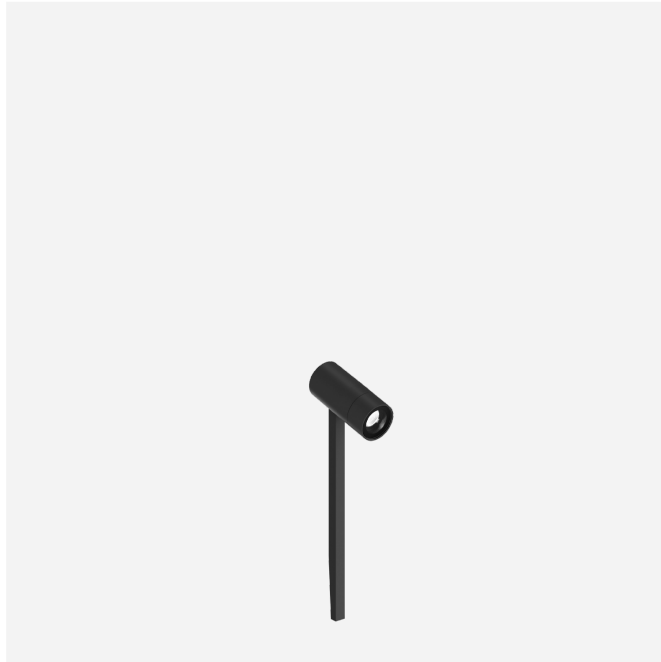

Cylindrical outdoor floor projector; surface Anthracite Grey; powder coated; matt texture; RAL 7016; PCB; light colour 2700 K; CRI ≥ 90 ; 24 V; 135° tiltable; degree of protection IP65; Class 3; driver not included; ground spike included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



LUMINAIRE

Floor
Surface
tilt max 135 °
Anthracite Grey
RAL 7016 ^a
IP65
Exterior
245 lm

LED MODULE

2700 K
CRI ≥ 90
L80 / 50000h
 ≤ 3 SDCM (initial MacAdam)

OPTICAL

Medium (standard)
beam angle 30°
CIE flux code: 98 100 100 100 100


ELECTRICAL

24 V
Class III

PHYSICAL

diameter 34 mm
height 76 mm
0.29 kg

LIGHT DISTRIBUTION



^a Colour may deviate slightly due to production conditions


CONE DIAGRAM

medium (standard) 31°

h (m)	E0° (lx)	ø (m)
1	693	0.56
2	173	1.11
3	77	1.67
4	43	2.22
5	28	2.78

ELECTRICAL ACCESSORIES
PLUG & PLAY DRIVER

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
30W IP67 220-240VAC		24V	118·35·26	90018014
75W IP67 220-240VAC		24V	162,5·43·32	90018015
plug type L 50W 24V IP67 100-277VAC		24V	110·63·32	C90018024
plug type L 100W 24V IP67 100-277VAC		24V	153·63·32	C90018025
plug type B 50W 24V IP67 100-277VAC		24V	110·63·32	L90018024
plug type B 100W 24V IP67 100-277VAC		24V	153·63·32	L90018025

PLUG & PLAY DRIVER CH

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
30W IP67		24V	150·48·31	90018016
60W IP67		24V	167·48·32	90018017

PLUG & PLAY DRIVER UK

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
30W IP67		24V	150·48·31	90018018
60W IP67		24V	167·48·32	90018019

PLUG & PLAY EXTENSION CABLE

TYPE	COLOUR	VOLTAGE	LENGTH (MM)	ITEM NUMBER
2.5 m IP67			2500	90014502
5 m IP67			5000	90014503
0.5 m IP67			500	90014505
1 m IP67			1000	90014506

PLUG & PLAY STRAIGHT CONNECTOR

TYPE	COLOUR	VOLTAGE	LENGTH (MM)	ITEM NUMBER
			200	90014504

PLUG & PLAY T-CONNECTOR

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
			48·24·15	90014501