WEVER & DUCRÉ LIGHTING

BLINK trim 1.0

721161B5

PROJECT

TYPE

NOTES

QUANTITY

DATE

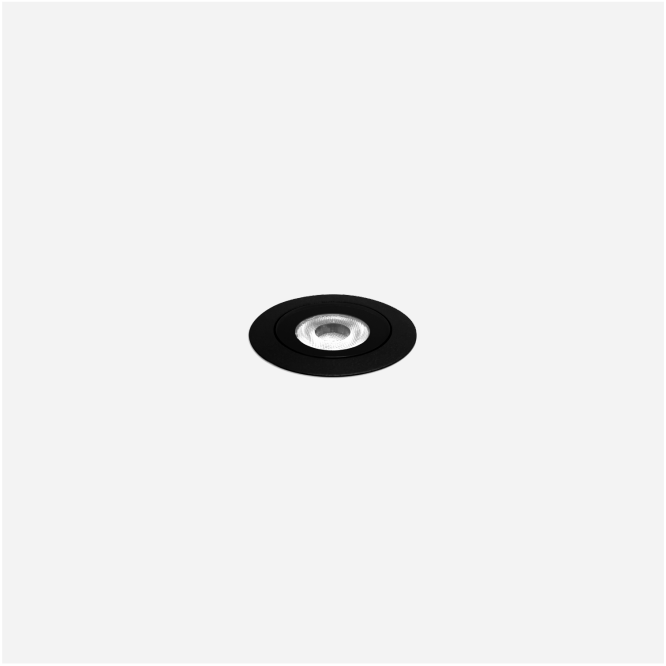

IP65

Round floor recessed luminaire made from aluminium and glass; with trim; surface Black Matt; RAL 9011; recessed depth 63mm; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90; beam angle 30°; degree of protection IP65; Class 3; driver not included; optional recessed ground housing available; light source not replaceable;



LUMINAIRE

Floor
Recessed
Black Matt
RAL 9011 [a]
IP65
IK08
Exterior
410 lm

LED MODULE

3000 K
CRI ≥ 90
L80 / 50000h
≤ 2 SDCM (initial MacAdam)

OPTICAL

Medium (standard)
beam angle 30°
CIE flux code: 96 99 100 100 100

ELECTRICAL

excl. driver
9 V
Class III

PHYSICAL

diameter 62 mm
height 57 mm
0.34 kg

CUTOUT

diameter 47-49 mm
recessed depth 63 mm

[a] Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION



BLINK trim 1.0

721161B5

CONE DIAGRAM

medium (standard) 32°

h (m)	E0° (lx)	ø (m)
1	1080	0.56
2	270	1.13
3	120	1.69
4	70	2.26
5	40	2.82

ELECTRICAL ACCESSORIES

DRIVER

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
7W | 500mA | 5-14.5V | IP67 | 100-240VAC		5-14.5V	57·41·24	90214301
6.5W | 500mA | 7-13V | phase-cut dim | 220-240VAC		7-13V	122·41·23	90224301

MOUNTING ACCESSORIES

GROUND HOUSING

TYPE	COLOUR	VOLTAGE	Ø·H (MM)	ITEM NUMBER
MAP 0.6 | CHART 0.6 | BLINK TRIM | TRIMLESS			132·105	90012201

['721161B5'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com