WEVER & DUCRÉ LIGHTING

PERLEZ CLIP IP44 3.0

392684W7


PROJECT

TYPE

NOTES

QUANTITY

DATE

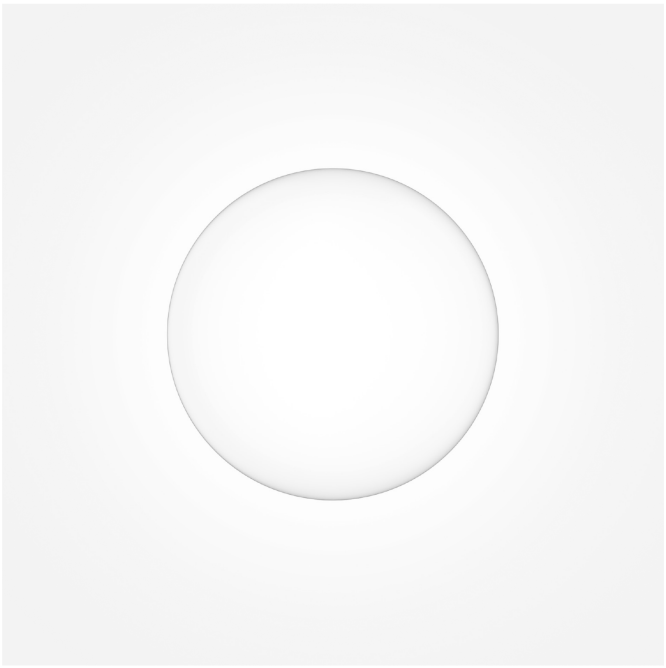

IP44

Round light sphere with diffuse light; for mounting on the mirror (2-7 mm) using a clip; white opal glass; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 4000 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 95; degree of protection IP44; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

LUMINAIRE

Wall
Surface
White Opal Glass
No matching RAL
IP44
Interior
705 lm

LED MODULE

4000 K
CRI ≥ 95
L80 / 60000 h
≤ 2 SDCM (initial MacAdam)

OPTICAL

Opal
CIE flux code: 24 49 75 51 100


ELECTRICAL


phase-cut dim
220 - 240 V
system 8.3 W
Class I

PHYSICAL

length 200 mm
width 121 mm
height 100 mm
0.66 kg

LIGHT DISTRIBUTION





Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.97	0.93	0.9	0.86	0.82
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF
MF	Maintenance Factor
LMF[a]	Luminaire Maintenance Factor
RSMF[a]	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor

[a]According to “CIE 97, Maintenance of indoor electric lighting systems”, 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

['392684W7'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com