




PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____

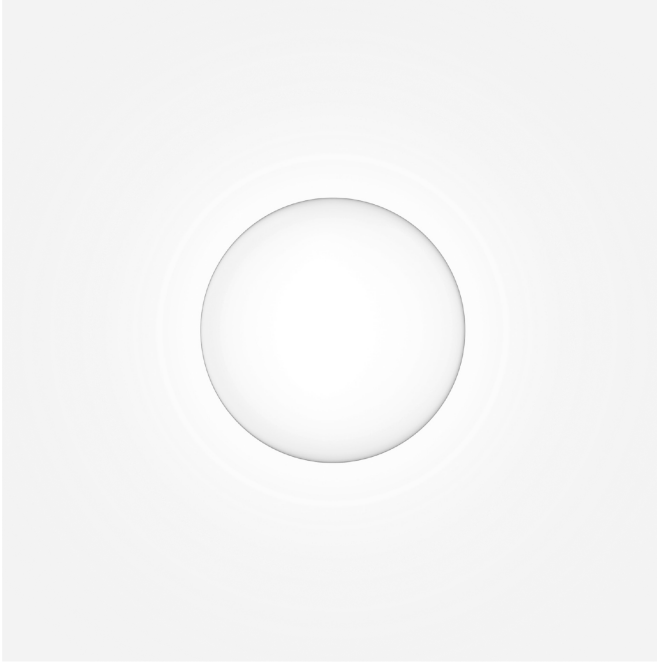

Round light sphere with diffuse light; for mounting on the mirror (2-7 mm) using a clip; white opal glass; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 4000 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 95 ; degree of protection IP44; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



LUMINAIRE

Wall _____
 Surface _____
 White Opal Glass _____
 No matching RAL _____
 IP44 _____
 Interior _____
 665 lm _____

LED Module

4000 K _____
 CRI ≥ 95 _____
 L80 / 60000 h _____
 ≤ 2 SDCM (initial MacAdam) _____

Optical

Opal _____
 CIE flux code: 24 49 75 51 100 _____


Electrical

phase-cut dim _____
 220 - 240 V _____
 system 8.3 W _____
 Class I _____
 Standard _____

Physical

length 160 mm _____
 width 101 mm _____
 height 160 mm _____
 0.53 kg _____

LIGHT DISTRIBUTION

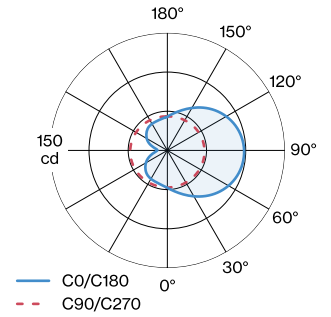

[392584W7] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.97	0.93	0.9	0.86	0.82
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.