




PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____

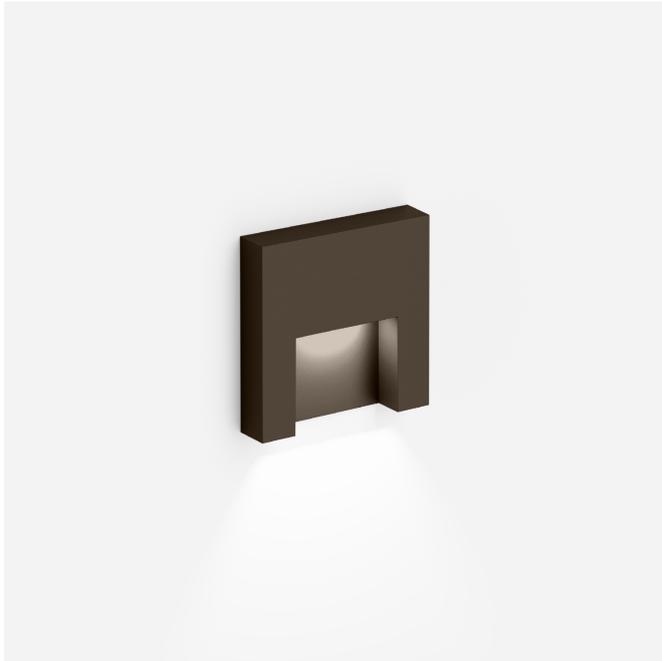

Square wall recessed luminaire made from aluminium; surface Bronze Brushed; powder coated; matt texture; RAL 7013; recessed depth 40 mm; suitable for ceiling thickness of min. 12 mm; PCB 3-step binning; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; degree of protection IP20; Class 3; driver not included; light source not replaceable;



LUMINAIRE

Wall _____
 Recessed _____
 Bronze Brushed _____
 RAL 7013 ^a _____
 IP20 _____
 Interior _____
 105 lm _____

LED Module

3000 K _____
 CRI ≥ 90 _____
 L80 / 50000h _____
 ≤ 3 SDCM (initial MacAdam) _____

Optical

Asymetric _____
 CIE flux code: 51 75 91 88 100 _____

Electrical

excl. driver _____
 9 V _____
 Class III _____
 Standard _____

Physical

length 80 mm _____
 width 16 mm _____
 height 80 mm _____
 0.23 kg _____

Cutout


length 66 mm _____
 width 66 mm _____
 min. ceiling thickness 12 mm _____
 recessed depth 40 mm _____

datasheet.quicksum.material

Aluminium _____

^a Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION



3451A1Q5



MOUNTING ACCESSORIES

Concrete Housing

Type	Colour	Voltage	L·W·H (MM)	Item number
RETO 0.8			69-69-61	90012046

Recessed Housing incl. plasterkit

Type	Colour	Voltage	L·W·H (MM)	Item number
RETO 0.8			109-109-74	90012047

ELECTRICAL ACCESSORIES

Driver

Type	Colour	Voltage	L·W·H (MM)	Item number
6W 350mA 3-22V		3-22V	68-35-21	90213202