





PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____

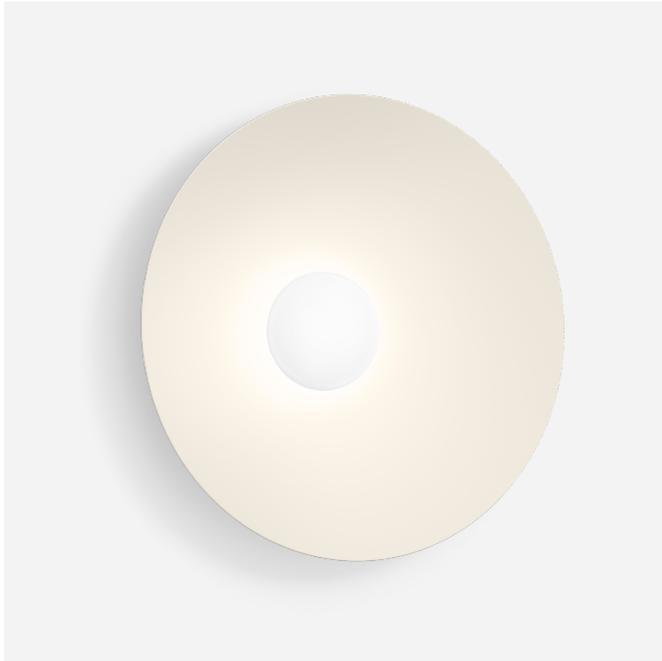

Round shape wall surface mounted luminaire with diffuse light; aluminium base in White Matt wet painted; matt texture; aluminium shade; surface Live Simple wet painted; matt texture; RAL 090 9005; white opal glass handblown; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; CRI (Colour Rendering Index) ≥ 90 ; degree of protection IP20; Class I; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

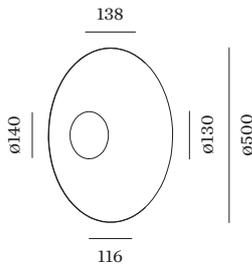

LUMINAIRE

Wall
Surface
Live Simple
RAL 090 9005 ^a
IP20
Interior
480 lm

LED Module

3000 K
CRI ≥ 90
L80 / 50000 h
≤ 2 SDCM (initial MacAdam)
650 lm
80 lm/W ^b

Optical

Opal
CIE flux code: 15 40 69 50 100

Electrical

phase-cut dim
220 - 240 V
system 10.1 W
Class I
Standard

Physical


diameter 500 mm
height 138 mm
1.31 kg

datasheet.quicksum.material

Aluminium

^a Colour may deviate slightly due to production conditions
^b Without electrical and optical losses

LIGHT DISTRIBUTION

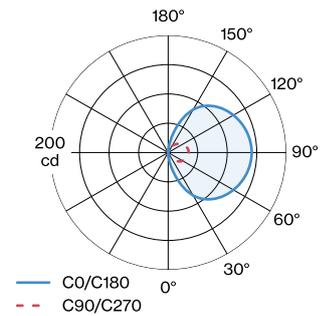



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF $LMF \times RSMF \times LLMF \times LSF$

MF Maintenance Factor

LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor

LLMF Lamp Lumens Maintenance Factor

LSF Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.