




PROJECT

TYPE


NOTES

QUANTITY

DATE



Ceiling surface spotlight made from die-cast aluminium; with rectangular base; surface Bronze; wet painted, matt smooth; RAL 7013; inner ring black; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; CRI ≥ 90; beam angle 31°; 220 - 240 V; 350° rotatable and 90° tiltable; degree of protection IP20; Class 1; driver included; optional honeycomb louver available, to reduce glare; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

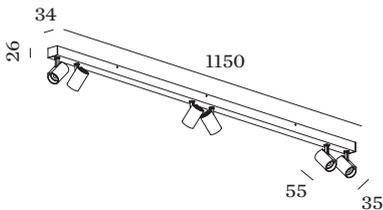

LUMINAIRE

Ceiling
 Surface
 tilt max 90 °
 rotation 350 °
 Bronze
 RAL 7013 ^a
 IP20
 Interior
 2890 lm

LED Module

2700 K
 CRI ≥ 90
 L70 / 55000h
 ≤ 2 SDCM (initial MacAdam)
 480 lm
 72 lm/W ^b

Optical

Medium (standard)
 beam angle 31°
 CIE flux code: 99 100 100 100
 100

Electrical

phase-cut dim
 220 - 240 V
 system 40 W
 Class I
 Standard

Physical


diameter 35 mm
 height 55 mm
 1.34 kg

datasheet.quicksum.material

Aluminium

^a Colour may deviate slightly due to production conditions
^b Without electrical and optical losses

LIGHT DISTRIBUTION

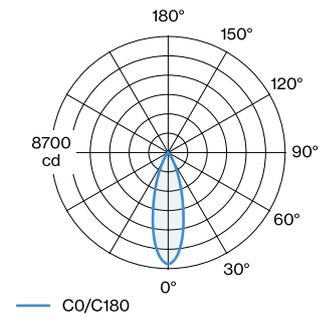

[176064Q3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



CONE DIAGRAM

medium (standard) 31°

h (m)	EO° (lx)	ø (m)
1	1390	0.55
2	350	1.10
3	150	1.65
4	90	2.21
5	60	2.76

OPTICAL ACCESSORIES

Honeycomb Louver

Type	Colour	Voltage	Ø (MM)	Item number
BLIEK petit CENO LECA PIRRO QITO	Black		29	915230B0