





PROJECT

TYPE


NOTES

QUANTITY

DATE

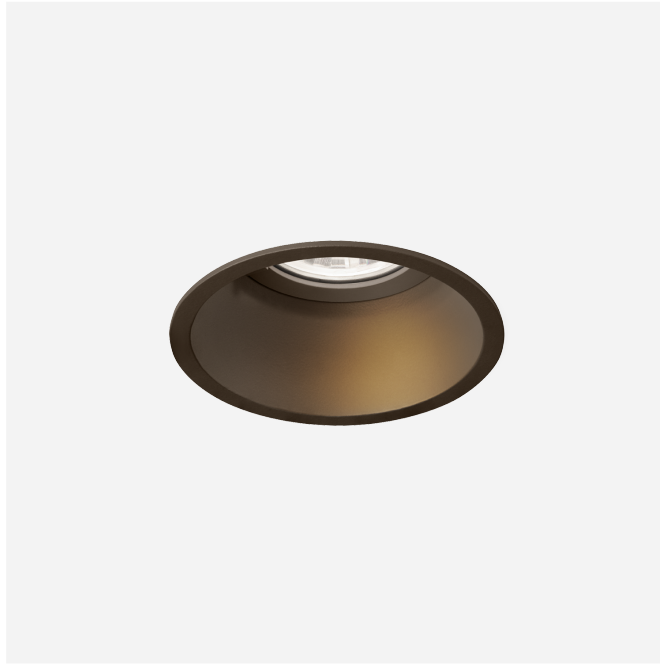

Round ceiling recessed downlight made from die-cast aluminium; surface Bronze; wet painted, matt smooth; RAL 7013; installation without tools using wire springs; suitable for ceiling thickness of 4-38 mm; recessed depth 90 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; beam angle 15°; degree of protection IP20; Class 3; driver not included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



LUMINAIRE

Ceiling
Recessed
Bronze
RAL 7013 ^a
IP20
Interior
560 lm / 350mA
755 lm / 500mA

LED MODULE

2700 K
CRI ≥ 90
L80 / 55000h
 ≤ 2 SDCM (initial MacAdam)
750 lm / 350mA
125 lm/W ^b
6 W ^b

OPTICAL

Narrow
beam angle 15°
CIE flux code: 88 99 100 100 100

ELECTRICAL

excl. driver
17 V
Class III

PHYSICAL


diameter 84 mm
height 86 mm
0.17 kg
wire springs

CUTOUT

diameter 76-79 mm
min. ceiling thickness 4 mm
max. ceiling thickness 38 mm
recessed depth 90 mm

^a Colour may deviate slightly due to production conditions
^b Without electrical and optical losses

LIGHT DISTRIBUTION

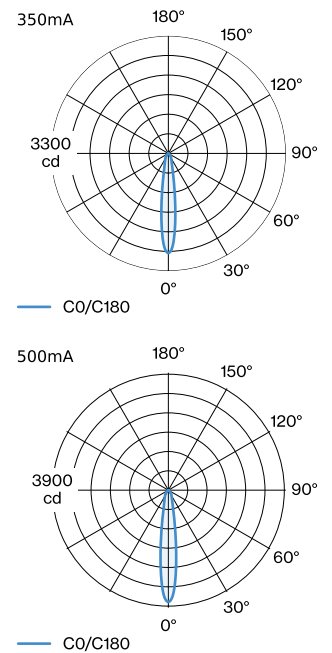



CONE DIAGRAM

narrow 16° 350mA			narrow 16° 500mA		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	2800	0.28	1	3760	0.28
2	700	0.55	2	940	0.55
3	310	0.83	3	420	0.83
4	170	1.11	4	240	1.11
5	110	1.39	5	150	1.39

Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.99	0.98	0.97	0.96	0.95
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF

MF Maintenance Factor

LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor

LLMF Lamp Lumens Maintenance Factor

LSF Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

ELECTRICAL ACCESSORIES

DRIVER

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
10W 500mA 13-20V 220-240VAC		13-20V	60-39-20	90214406
10W 500mA 12-21V phase-cut dim 220-240VAC		12-21V	115-41-25	90224403
15W 500mA 10-31V DALI-2 push dim 220-240VAC		10-31V	166-29-21	90244501