



PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____



Ceiling suspended luminaire; italian hand blown white opal glass; mounting made from aluminium in Black Matt; powder coated; matt texture; inclusive adjustable cable suspension max. 2500mm; lamp socket E14; lamp type C35; max. 6W; 220 - 240 V; degree of protection IP20; Class 1; lamp not included;

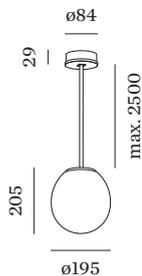

LUMINAIRE

Ceiling _____

Suspended _____

Black Matt + White Opal Glass _____

No matching RAL _____

IP20 _____

Interior _____

LAMP

lamp C35 _____

socket E14 _____

max. per socket 6.0 W _____

2700 K _____

CRI ≥ 90 _____

≤ 6 SDCM (initial MacAdam) _____

Optical

Opal _____

Electrical

220 - 240 V _____

Class I _____

Standard _____

Physical

diameter 195 mm _____

height 205 mm _____

1.07 kg _____

cable length 2500 mm _____


datasheet.quicksum.material

Glass _____

MEASURED LAMP

9003C103 _____

390 lm _____

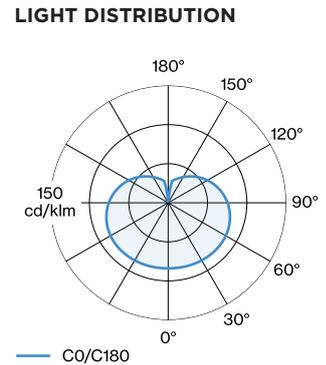

[‘2522COWB0’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

2522COWB0



LAMPS

C35 LED Lamp

Type

2700K | E14

Colour

Voltage

Ø·H (MM)

Item number

36·100

9003C103