




PROJECT

TYPE


NOTES

QUANTITY

DATE

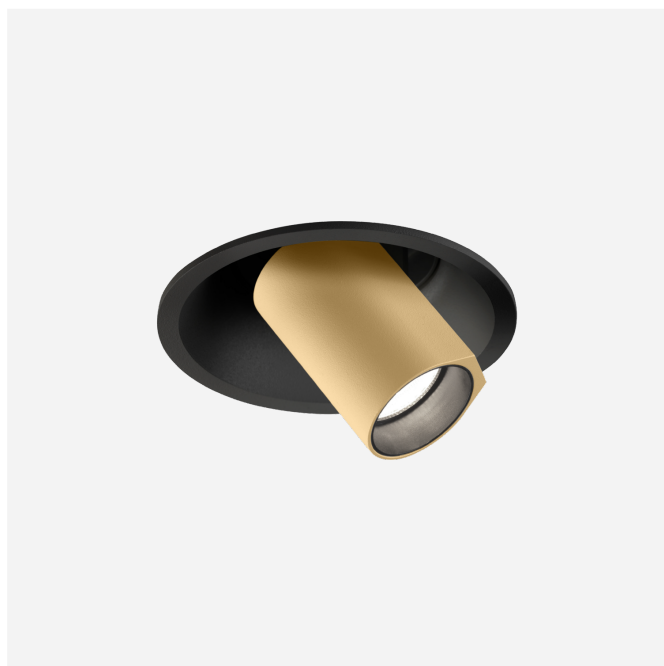

Round ceiling recessed downlight made from die-cast aluminium; adjustable; surface Black Matt + Champagne; powder coated; matt texture + wet painted; smooth semi glossy; RAL 9011; inner ring black; installation without tools using wire springs; suitable for ceiling thickness of 4-23 mm; recessed depth 60 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; CRI $\geq$ 90; beam angle 31°; 355° rotatable and 60° tiltable; degree of protection IP20; Class 3; IC rated; Loxone ready; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



LUMINAIRE

Ceiling
Semi-Recessed
tilt max 60 °
rotation 355 °
Black Matt + Champagne
RAL 9011 ^a
IP20
IC rated
Interior
495 lm

LED MODULE

2700 K
CRI $\geq$ 90
L70 / 55000h

OPTICAL

Medium (standard)
beam angle 31°

ELECTRICAL

Loxone
24 V
Class III

PHYSICAL

diameter 35 mm
height 55 mm
0.2 kg
wire springs

CUTOUT

diameter 86-89 mm
min. ceiling thickness 4 mm
max. ceiling thickness 23 mm
recessed depth 60 mm

^a Colour may deviate slightly due to production conditions

16446LBM3



OPTICAL ACCESSORIES

Honeycomb Louvre for Loxone

TYPE	COLOUR	VOLTAGE	Ø (MM)	ITEM NUMBER
	Black		29	91523LB0