WEVER & DUCRÉ LIGHTING

DARF 4.2

2568T8B5

PROJECT

TYPE

NOTES

QUANTITY

DATE

Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; inclusive black adjustable cable suspension max. 2000mm; phase-cut dim; light colour 3000 K; CRI ≥ 90; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by end-user;

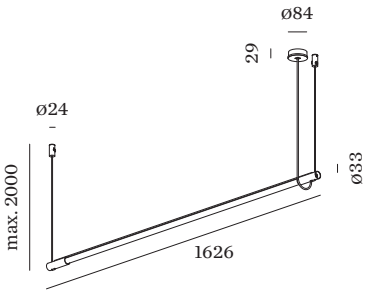

LUMINAIRE

Ceiling
Suspended
Black Matt
RAL 9011 [a]
IP20
Interior
2940 lm

LED MODULE

3000 K
CRI ≥ 90
L70 / 50000h
≤ 3 SDCM (initial MacAdam)

OPTICAL

Opal
CIE flux code: 40 70 89 90 100

ELECTRICAL

phase-cut dim
220 - 240 V
system 23.0 W
Class II

PHYSICAL

length 33 mm
width 1626 mm
height 33 mm
0.42 kg
cable length 2000 mm

[a] Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION



['2568T8B5'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com