

# DARF 1.1

2561T7B4

## GENERAL

Ceiling , Suspended

Black Matt

RAL 9005 <sup>a</sup>

IP20

Interior

Indirect 1030 lm

Direct 2530 lm

Total 3560 lm

CIE flux code: 36 64 84 71 100

## LED

3000 K

CRI ≥ 80

L70 / 60000h

3 SDCM

## OPTICAL

Opal

## ELECTRICAL

non dim

220 - 240 V

Total connected power 22.1 W

Class 2

## PHYSICAL

Length 33 mm

Width 1626 mm

Height 33 mm

0.42 kg

<sup>a</sup> Color may deviate slightly due to production conditions.

Project

Type


Notes

Quantity


Date



Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9005; non dim; light colour 3000 K; CRI ≥ 80; 220 - 240 V; degree of protection IP20; PC2; light source replaceable by end-user;

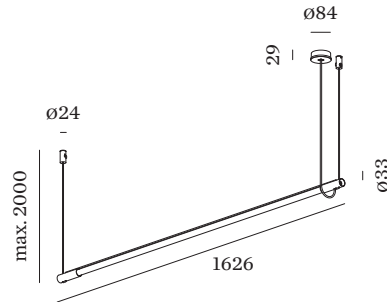

## LIGHT DISTRIBUTION





WEVER & DUCRÉ  
LIGHTING

# DARF 1.1

2561T7B4