WEVER & DUCRÉ LIGHTING

DARF 1.1

2561T7B4

PROJECT

TYPE

NOTES

QUANTITY

DATE

Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; 2000; non dim; light colour 3000 K; CRI ≥ 80; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by end-user;

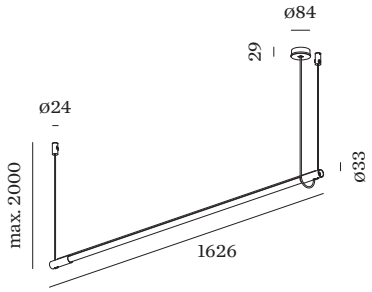

LUMINAIRE

Ceiling
Suspended
Black Matt
RAL 9011 [a]
IP20
Interior
3560 lm

LED Module

3000 K
CRI ≥ 80
L70 / 60000h
≤ 3 SDCM (initial MacAdam)

Optical

Opal
CIE flux code: 36 64 84 71 100

Electrical

non dim
220 - 240 V
system 22.1 W
Class II
Standard

Physical

length 1624 mm
width 33 mm
height 33 mm
0.42 kg
cable length 2000 mm

datasheet.quicksum.material

Polycarbonate

[a] Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION



['2561T7B4'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com