



WEVER & DUCRÉ  
LIGHTING

# DARF WALL 1.2

2563T8B5

## GENERAL

Wall , Surface

Black Matt

RAL 9005 <sup>a</sup>

IP20

Interior

Output: 2940 lm

CIE flux code: 40 70 89 90 100

## LED

3000 K

CRI  $\geq$  90

L70 / 50000h

3 SDCM

## OPTICAL

Opal

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 23.0 W

Class 2

## PHYSICAL

Length 33 mm

Width 1626 mm

Height 33 mm

0.33 kg

cable plug with switch

<sup>a</sup> Color may deviate slightly due to production conditions.

Project

Type


Notes

Quantity


Date



Tubular wall surface luminaire made from aluminium; surface Black Matt; powder coated; matt texture; RAL 9005; phase-cut dim; light colour 3000 K; CRI  $\geq$  90; 220 - 240 V; degree of protection IP20; PC2; light source replaceable by end-user;

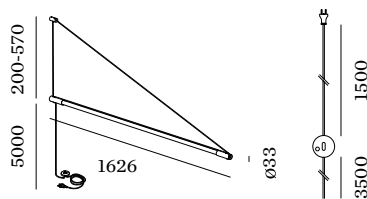

## LIGHT DISTRIBUTION





WEVER & DUCRÉ  
LIGHTING

# DARF WALL 1.2

2563T8B5