



WEVER & DUCRÉ
LIGHTING

DARF WALL 1.1

2563T7B6

Project

Type

Notes

Quantity

Date

GENERAL

Wall , Surface

Black Matt

RAL 9005^a

IP20

Interior

Output: 3950 lm

CIE flux code: 36 64 84 71 100

LED

4000 K

CRI ≥ 80

L70 / 60000h

3 SDCM

OPTICAL

Opal

ELECTRICAL

non dim

220 - 240 V

Total connected power 22.1 W

Class 2

PHYSICAL

Length 33 mm

Width 1626 mm

Height 33 mm


0.33 kg

cable plug with switch


^a Color may deviate slightly due to production conditions.



Tubular wall surface luminaire made from aluminium; surface Black Matt; powder coated; matt texture; RAL 9005; non dim; light colour 4000 K; CRI ≥ 80 ; 220 - 240 V; degree of protection IP20; PC2; light source replaceable by end-user;

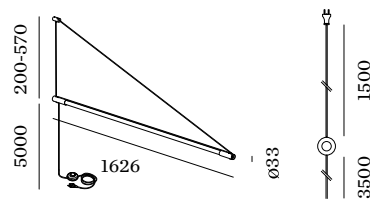

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

DARF WALL 1.1

2563T7B6