

DARF 1.2

2561T8B5

GENERAL

Ceiling , Suspended
Black Matt
RAL 9005 ^a
IP20
Interior
Output: 2940 lm
CIE flux code: 40 70 89 90 100

LED

3000 K
CRI ≥ 90
L70 / 50000h
3 SDCM

OPTICAL

Opal

ELECTRICAL

phase-cut dim
220 - 240 V
Total connected power 23.0 W
Class 2

PHYSICAL

Length 33 mm
Width 1626 mm
Height 33 mm
0.42 kg

^a Color may deviate slightly due to production conditions.

Project _____

Type _____


Notes _____

Quantity _____


Date _____



Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9005; phase-cut dim; light colour 3000 K; CRI ≥ 90; 220 - 240 V; degree of protection IP20; PC2; light source replaceable by end-user;

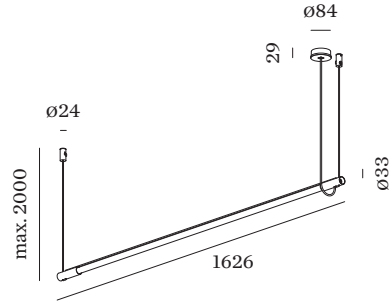

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

DARF 1.2

2561T8B5