

DARF 1.1

2561T7B6

GENERAL

Ceiling , Suspended

Black Matt

RAL 9005 ^a

IP20

Interior

Indirect 1140 lm

Direct 2810 lm

Total 3950 lm

CIE flux code: 36 64 84 71 100

LED

4000 K

CRI \geq 80

L70 / 60000h

3 SDCM

OPTICAL

Opal

ELECTRICAL

non dim

220 - 240 V

Total connected power 22.1 W

Class 2

PHYSICAL

Length 33 mm

Width 1626 mm

Height 33 mm

0.42 kg

^a Color may deviate slightly due to production conditions.

Project

Type


Notes

Quantity


Date



Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9005; non dim; light colour 4000 K; CRI \geq 80; 220 - 240 V; degree of protection IP20; PC2; light source replaceable by end-user;

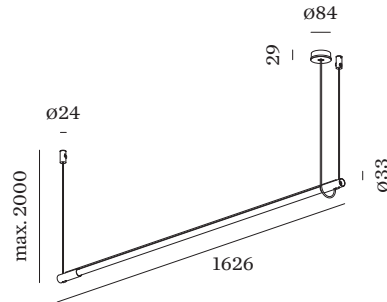

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

DARF 1.1

2561T7B6