



WEVER & DUCRÉ
LIGHTING

DARF WALL 1.2

2563T8B3

Project

Type

Notes

Quantity

Date

GENERAL

Wall , Surface

Black Matt

RAL 9005 ^a

IP20

Interior

Output: 2780 lm

CIE flux code: 40 70 89 90 100

LED

2700 K

CRI \geq 90

L70 / 50000h

3 SDCM

OPTICAL

Opal

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 21.8 W

Class 2

PHYSICAL

Length 33 mm

Width 1626 mm

Height 33 mm


0.33 kg

cable plug with switch


^a Color may deviate slightly due to production conditions.



Tubular wall surface luminaire made from aluminium; surface Black Matt; powder coated; matt texture; RAL 9005; phase-cut dim; light colour 2700 K; CRI \geq 90; 220 - 240 V; degree of protection IP20; PC2; light source replaceable by end-user;

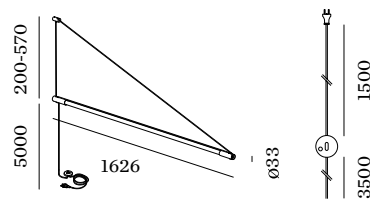

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

DARF WALL 1.2

2563T8B3