

# PIRRO OPAL 4.0

151484J3

# GENERAL

Ceiling, Surface
White Matt + Gold
RAL 9010 <sup>a</sup>
IP20
Interior
Output: 685 lm
CIE flux code: 65 94 100 100 100

#### LED

2700 K	
CRI ≥ 90	
L80/60000h	
3 SDCM	

#### **OPTICAL**

Opal


#### **ELECTRICAL**

phase-cut dim	
220 - 240 V	
Total connected power 12.0 W	
Class 1	

#### **PHYSICAL**

Length 182 mm
Width 50 mm
Height 65 mm
0.52 kg

<sup>&</sup>lt;sup>a</sup> Color may deviate slightly due to production

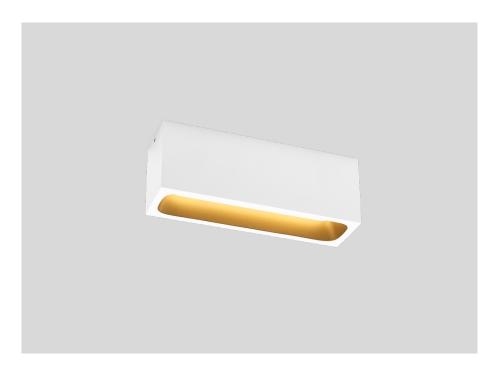











Rectangular ceiling surface mounted downlight made from die-cast aluminium with opal PMMA cover; surface housing White Matt powder coated; matt texture; with aesthetic frame in Gold wet painted; matt smooth; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; CRI (Colour Rendering Index)  $\geq$  90; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



#### LIGHT DISTRIBUTION





# PIRRO OPAL 4.0

151484J3

## **MOUNTING**

## 1.0 CEILING BASE

TYPE	COLOUR	L·W·H (MM)	ORDERCODE
PIRRO SYSTEM	White	754.51.12	90052072
PIRRO SYSTEM	Black	754.51.12	90052073
PIRRO SYSTEM	Gold	754.51.12	90052074

## 2.0 CEILING BASE

TYPE	COLOUR	L·W·H (MM)	ORDERCODE
PIRRO SYSTEM	White	1150-51-12	90052075
PIRRO SYSTEM	Black	1150-51-12	90052076
PIRRO SYSTEM	Gold	1150 · 51 · 12	90052077