

# PIRRO OPAL 2.0

151284J5

## GENERAL

Ceiling , Surface

White Matt + Gold

RAL 9010 <sup>a</sup>

IP20

Interior

Output: 280 lm

CIE flux code: 65 94 100 100 100

## LED

3000 K

CRI  $\geq 90$

L80 / 60000h

3 SDCM

## OPTICAL

Opal

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 6.6 W

Class I

## PHYSICAL

Length 94 mm

Width 50 mm

Height 65 mm

0.3 kg

<sup>a</sup> Color may deviate slightly due to production conditions.


Project

Type


Notes

Quantity


Date

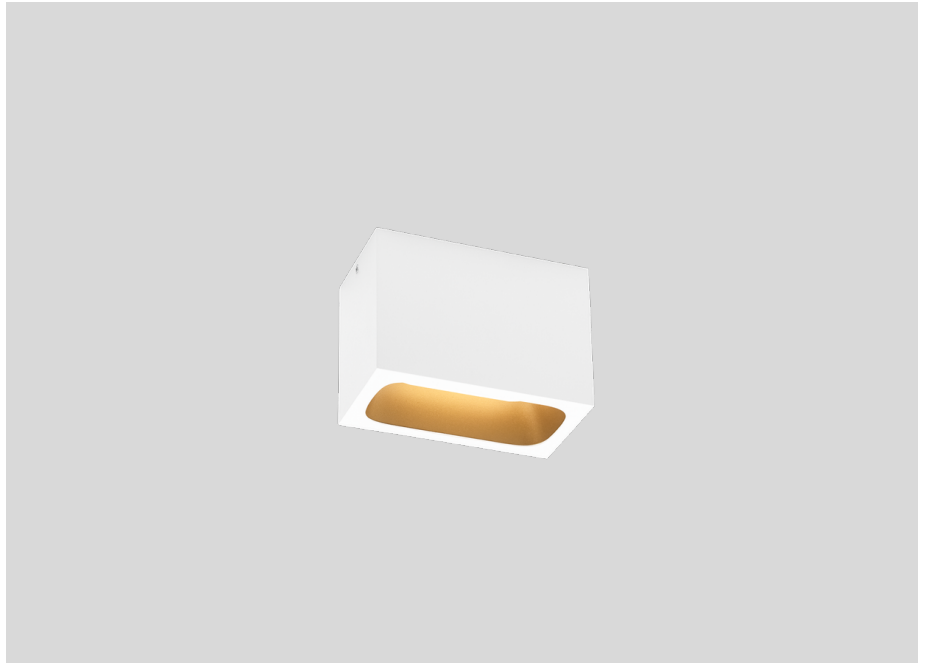

Rectangular ceiling surface mounted downlight made from die-cast aluminium with opal PMMA cover; surface housing White Matt powder coated; matt texture; with aesthetic frame in Gold wet painted; matt smooth; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; CRI (Colour Rendering Index)  $\geq 90$ ; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



## LIGHT DISTRIBUTION



PIRRO

OPAL 2.0

151284J5

MOUNTING

1.0 CEILING BASE

| TYPE         | COLOUR | L · W · H (MM) | ORDERCODE       |
|--------------|--------|----------------|-----------------|
| PIRRO SYSTEM | White  | 754 · 51 · 12  | 9 0 0 5 2 0 7 2 |
| PIRRO SYSTEM | Black  | 754 · 51 · 12  | 9 0 0 5 2 0 7 3 |
| PIRRO SYSTEM | Gold   | 754 · 51 · 12  | 9 0 0 5 2 0 7 4 |

2.0 CEILING BASE

| TYPE         | COLOUR | L · W · H (MM) | ORDERCODE       |
|--------------|--------|----------------|-----------------|
| PIRRO SYSTEM | White  | 1150 · 51 · 12 | 9 0 0 5 2 0 7 5 |
| PIRRO SYSTEM | Black  | 1150 · 51 · 12 | 9 0 0 5 2 0 7 6 |
| PIRRO SYSTEM | Gold   | 1150 · 51 · 12 | 9 0 0 5 2 0 7 7 |