

PIRRO OPAL 2.0

151284E3

GENERAL Ceiling, Surface White Matt + Black Matt RAL 9003 + RAL 9005 a IP20 Interior Output: 220 lm CIE flux code: 65 94 100 100 100 LED 2700 K CRI ≥ 90 L80 / 60000h 3 SDCM

OPTICAL

Opal


ELECTRICAL

phase-cut dim	
220 - 240 V	
Total connected power 6.6 W	
Class 1	

PHYSICAL

Length 94 mm	
Width 50 mm	
Height 65 mm	
0.3 kg	

^a Color may deviate slightly due to production conditions.

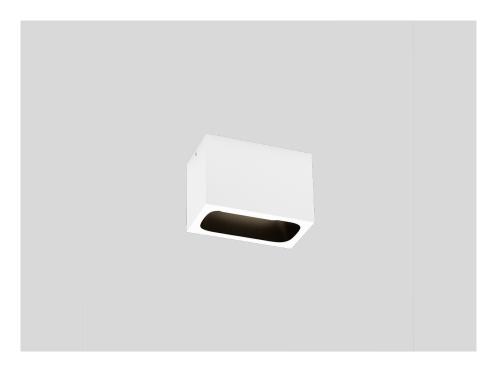










Rectangular ceiling surface mounted downlight made from die-cast aluminium with opal PMMA cover; surface housing White Matt powder coated; matt texture; with aesthetic frame in Black Matt wet painted; matt fine texture; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; CRI (Colour Rendering Index) \geq 90; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



LIGHT DISTRIBUTION





PIRRO OPAL 2.0

151284E3

MOUNTING

1.0 CEILING BASE

TYPE	COLOUR	L·W·H (MM)	ORDERCODE
PIRRO SYSTEM	White	754.51.12	90052072
PIRRO SYSTEM	Black	754.51.12	90052073
PIRRO SYSTEM	Gold	754.51.12	90052074

2.0 CEILING BASE

TYPE	COLOUR	L·W·H (MM)	ORDERCODE
PIRRO SYSTEM	White	1150.51.12	90052075
PIRRO SYSTEM	Black	1150-51-12	90052076
PIRRO SYSTEM	Gold	1150.51.12	90052077