





PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____

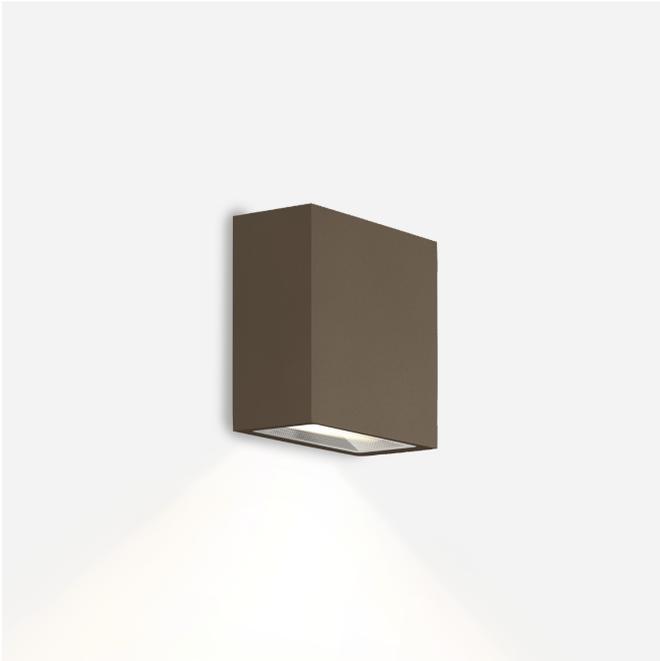

Rectangular wall surface luminaire made from aluminium; surface Bronze; powder coated; matt texture; RAL 075 30 10; up or down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; 220 - 240 V; degree of protection IP65; Class 1; light source not replaceable; control gear replaceable by end-user;



LUMINAIRE

Wall _____

Surface _____

Bronze _____

RAL 075 30 10 ^a _____

IP65 _____

Exterior _____

620 lm _____

LED Module

3000 K _____

CRI ≥ 90 _____

L80 / 100000 h _____

≤ 3 SDCM (initial MacAdam) _____

Optical

Wide _____

CIE flux code: 70 95 100 100 _____

100 _____

Electrical

phase-cut dim _____

220 - 240 V _____

system 8.0 W _____

Class I _____

Standard _____

Physical

length 98 mm _____

width 55 mm _____

height 98 mm _____


0.58 kg _____

datasheet.quicksum.material

Aluminium _____

^a Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION

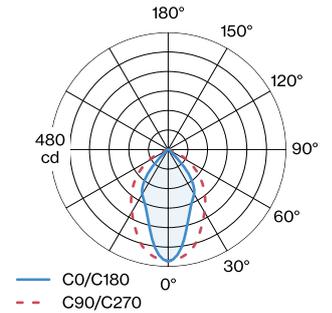

[313774Q5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



Maintenance Factor

| | | | | | |
|--------------------|--------|--------|--------|--------|--------|
| Operating Time [h] | 10.000 | 20.000 | 30.000 | 40.000 | 50.000 |
| LLMF | 0.98 | 0.98 | 0.98 | 0.97 | 0.97 |
| LSF | 1 | 1 | 1 | 1 | 1 |

| | | | |
|------------------|--|-------------------|---------------------------------|
| MF | $LMF \times RSMF \times LLMF \times LSF$ | RSMF ^a | Room Surface Maintenance Factor |
| MF | Maintenance Factor | LLMF | Lamp Lumens Maintenance Factor |
| LMF ^a | Luminaire Maintenance Factor | LSF | Lamp Survival Factor |

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.