



WEVER & DUCRÉ
LIGHTING

MICK snooze 1.0

159643J3

GENERAL

Wall , Surface

Tilt max 90°

Rotation 350°

White Matt + Gold

IP20

Interior

Output: 185 lm

CIE flux code: 90 98 100 100 100

LED

2700 K

CRI ≥ 90

L80 / 50000 h

2 SDCM

OPTICAL

Medium , Beam angle 23°

ELECTRICAL

incl. driver

220 - 240 V

Total connected power 7.5 W

Class 1

PHYSICAL

Length 130 mm

Width 26 mm

Height 26 mm

0.39 kg

incl. switch on/off


Project

Type


Notes

Quantity


Date

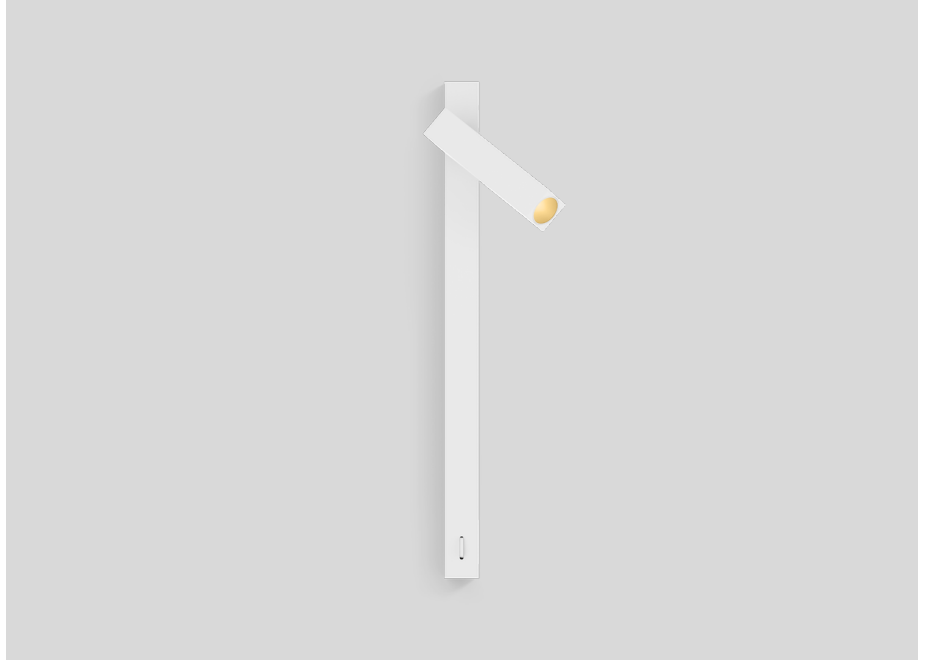

Bedside luminaire made from die-cast aluminium with rectangular base; inclusive on/off switch in white; surface White Matt + Gold; powder coated; matt texture; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; beam angle 23°; 220 - 240 V; 350° rotatable and 90° tiltable; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



LIGHT DISTRIBUTION



MICK

snooze 1.0

159643J3

CONE DIAGRAM

medium 18°

h (m)	EO° (lx)	ø (m)
1	1110	0.31
2	280	0.62
3	120	0.93
4	70	1.25
5	40	1.56

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to “CIE 97, Maintenance of indoor electric lighting systems”, 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.