



WEVER & DUCRÉ  
LIGHTING

# PIRRO SPOT SURFACE 6.0

151664K3

Project

Type

Notes

Quantity

Date

## GENERAL

Ceiling, Surface

Black Matt + Gold

RAL 9005<sup>a</sup>

IP20

Interior

Output: 2000 lm

CIE flux code: 99 100 100 100 100

## LED

2700 K

CRI  $\geq 90$

L70 / 55000h

2 SDCM

## OPTICAL

Medium, Beam angle 32°

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 28.3 W

Class 1

## PHYSICAL


Length 270 mm

Width 50 mm


Height 80 mm

0.8 kg

<sup>a</sup> Color may deviate slightly due to production conditions.

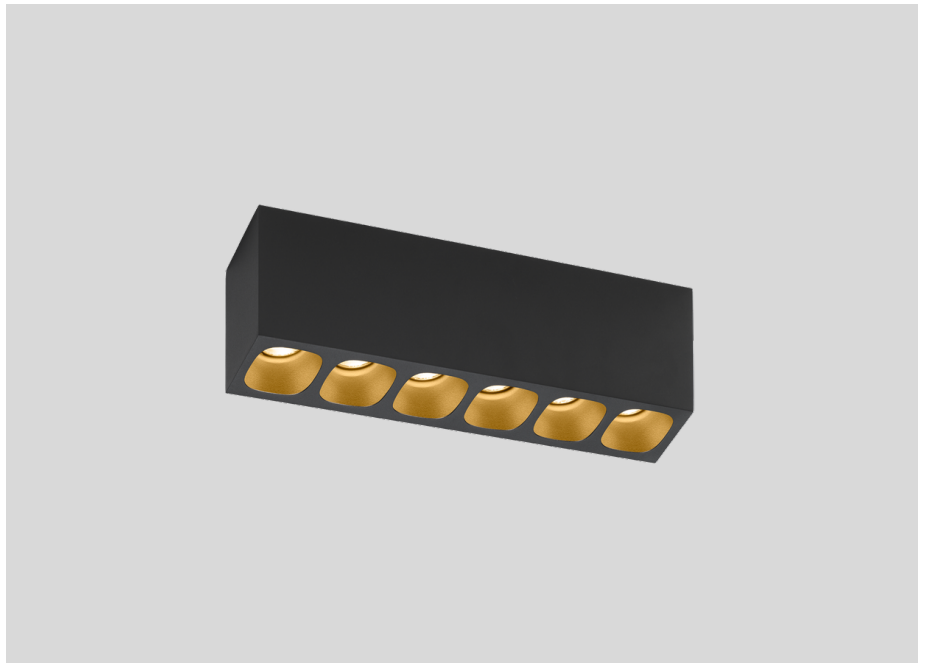

Rectangular ceiling surface mounted downlight made from die-cast aluminium; housing Black Matt powder coated; matt texture; with reflector in Gold wet painted; matt smooth; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; degree of protection IP20; PC1; UGR  $\leq 13$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 1500$  cd/m<sup>2</sup>; driver included; optional honeycomb louver available, to reduce glare; light source replaceable by an authorized professional; control gear replaceable by end-user;




PIRRO

SPOT SURFACE 6.0

151664K3

LIGHT DISTRIBUTION



Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.9	0.88	0.85	0.83	0.81
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

<sup>a</sup> According to “CIE 97, Maintenance of indoor electric lighting systems”, 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

OPTICAL

Honeycomb Louver

TYPE	Ø (MM)	ORDERCODE
BLIEK PETIT   CENO   LECA   PIRRO	29	9 0 0 5 1 1 3 1