



WEVER & DUCRÉ
LIGHTING

PIRRO SPOT SURFACE 6.0

151664E5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling, Surface

White Matt + Black Matt

IP20

Interior

Output: 2020 lm

CIE flux code: 99 100 100 100 100

LED

3000 K

CRI ≥ 90

L70 / 55000h

2 SDCM

OPTICAL

Medium, Beam angle 32°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 28.3 W

Class 1



PHYSICAL

Length 270 mm


Width 50 mm

Height 80 mm

0.8 kg

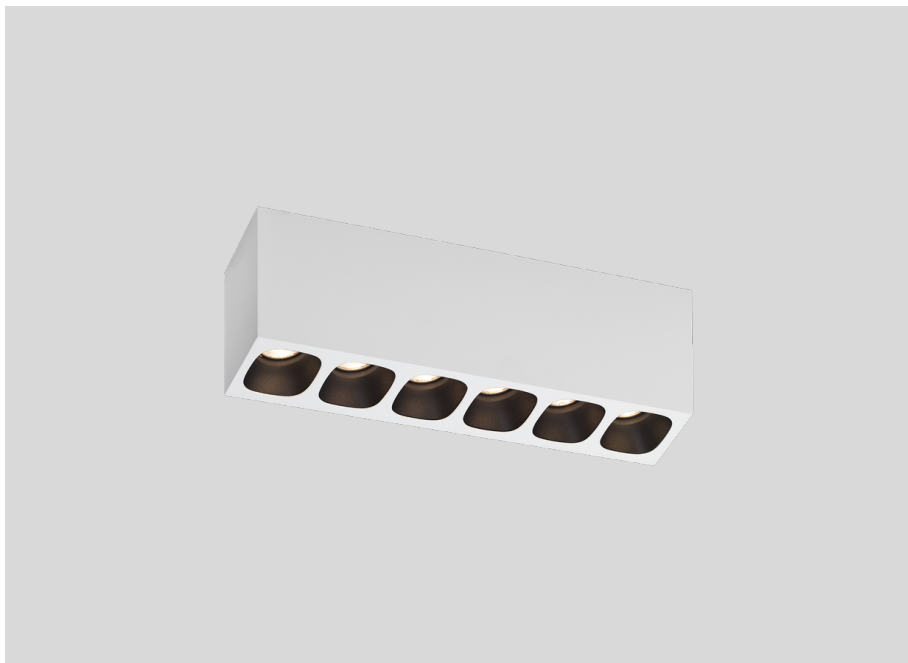

Rectangular ceiling surface mounted downlight made from die-cast aluminium; housing White Matt powder coated; matt texture; with reflector in Black Matt wet painted; matt fine texture; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; degree of protection IP20; PC1; UGR ≤ 13 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; driver included; optional honeycomb louver available, to reduce glare; light source replaceable by an authorized professional; control gear replaceable by end-user;




PIRRO

SPOT SURFACE 6.0

151664E5

LIGHT DISTRIBUTION



Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.9	0.88	0.85	0.83	0.81
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

^a According to “CIE 97, Maintenance of indoor electric lighting systems”, 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

OPTICAL

Honeycomb Louver

TYPE	Ø (MM)	ORDERCODE
BLIEK PETIT CENO LECA PIRRO	29	9 0 0 5 1 1 3 1