




**PROJECT** \_\_\_\_\_

**TYPE** \_\_\_\_\_


**NOTES** \_\_\_\_\_

**QUANTITY** \_\_\_\_\_

**DATE** \_\_\_\_\_



Square floor recessed luminaire made from stainless steel and glass; surface Inox; No matching RAL; recessed depth 118 mm; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K;  $\leq 3$  SDCM (initial MacAdam); CRI  $\geq 90$ ; beam angle 43°; degree of protection IP67; Class 2; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



**LUMINAIRE**

Floor \_\_\_\_\_  
 Recessed \_\_\_\_\_  
 Inox \_\_\_\_\_  
 No matching RAL \_\_\_\_\_  
 IP67 \_\_\_\_\_  
 IK08 \_\_\_\_\_  
 Exterior \_\_\_\_\_  
 310 lm \_\_\_\_\_

**LED Module**

3000 K \_\_\_\_\_  
 CRI  $\geq 90$  \_\_\_\_\_  
 L70 / 55000h \_\_\_\_\_  
 $\leq 3$  SDCM (initial MacAdam) \_\_\_\_\_

**Optical**

Wide \_\_\_\_\_  
 beam angle 43° \_\_\_\_\_  
 UGR  $\leq 10$  \_\_\_\_\_  
 CIE flux code: 25 48 71 0 100 \_\_\_\_\_  
 $\geq 65^\circ < 1500 \text{ cd/m}^2$  \_\_\_\_\_

**Electrical**

phase-cut dim \_\_\_\_\_  
 220 - 240 V \_\_\_\_\_  
 system 5.0 W \_\_\_\_\_  
 Class II \_\_\_\_\_  
 Standard \_\_\_\_\_

**Physical**

length 55 mm \_\_\_\_\_  
 width 55 mm \_\_\_\_\_  
 height 95 mm \_\_\_\_\_  
 0.39 kg \_\_\_\_\_


**Cutout**

recessed depth 118 mm \_\_\_\_\_

**datasheet.quicksum.material**

Stainless Steel 304 \_\_\_\_\_

**LIGHT DISTRIBUTION**

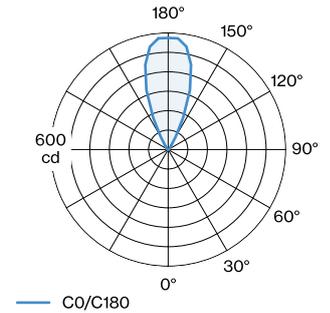

75216815



**MOUNTING ACCESSORIES**

**Ground Housing**

Type	Colour	Voltage	Ø·H (MM)	Item number
MAP 0.6   CHART 0.6   BLINK TRIM   TRIMLESS			132·105	90012201