




PROJECT

TYPE

NOTES

QUANTITY


DATE

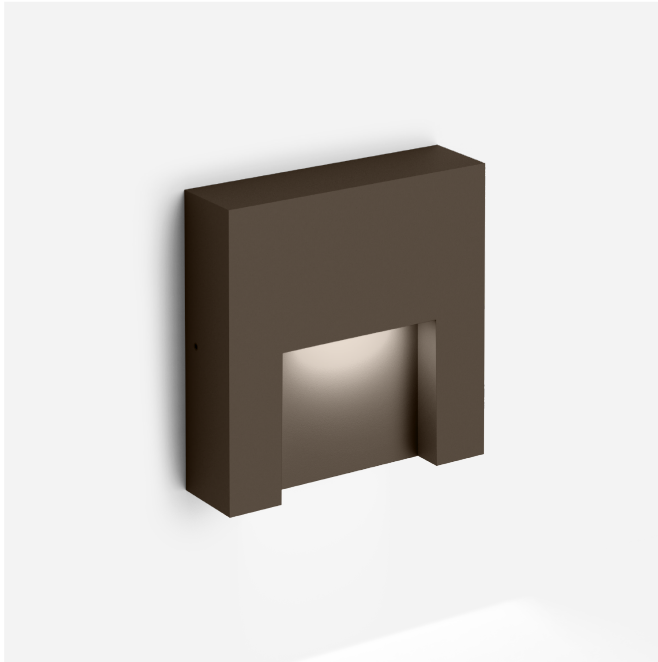

IP65



Squared wall surface mounted luminaire made from aluminium; surface Bronze; powder coated; matt texture; RAL 075 30 10; PCB 3-step binning; phase-cut dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; degree of protection IP65; Class 1; driver included; light source not replaceable; control gear replaceable by end-user;



LUMINAIRE

Wall

Surface

Bronze

RAL 075 30 10 ^a

IP65

Exterior

160 lm

LED MODULE

3000 K

CRI ≥ 90

L80 / 50000h

≤ 3 SDCM (initial MacAdam)

OPTICAL

Asymetric

CIE flux code: 60 85 97 100

100

ELECTRICAL

phase-cut dim

220 - 240 V

system 5.1 W

Class I

PHYSICAL


length 130 mm

width 36 mm

height 130 mm

0.62 kg

LIGHT DISTRIBUTION



^a Colour may deviate slightly due to production conditions