WEVER & DUCRÉ LIGHTING

# RETO WALL SURFACE OUTDOOR 1.3

**7455A4A5**


**PROJECT**

**TYPE**

**NOTES**


**QUANTITY**

**DATE**

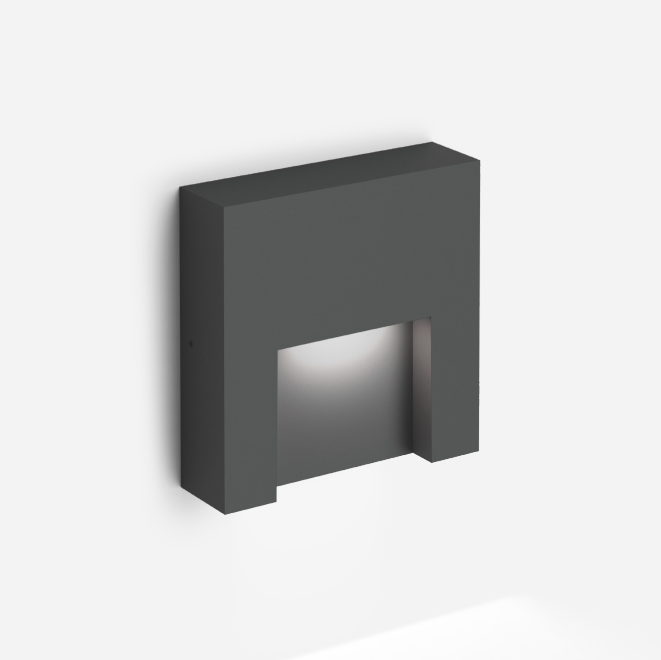

IP65

Squared wall surface mounted luminaire made from aluminium; surface Anthracite Grey; powder coated; matt texture; RAL 7016; PCB; phase-cut dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; degree of protection IP65; Class 1; driver included; light source not replaceable; control gear replaceable by end-user;




## LUMINAIRE

Wall
Surface
Anthracite Grey
RAL 7016 [a]
IP65
Exterior
160 lm

## LED MODULE

3000 K
CRI ≥ 90
L80 / 50000h
≤ 3 SDCM (initial MacAdam)

## OPTICAL

Asymetric
CIE flux code: 60 85 97 100 100

## ELECTRICAL


phase-cut dim
220 - 240 V
system 5.1 W
Class I

## PHYSICAL

length 130 mm
width 36 mm
height 130 mm
0.62 kg

[a] Colour may deviate slightly due to production conditions

## LIGHT DISTRIBUTION




['7455A4A5'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com