



**PROJECT**

---

**TYPE**

---

**NOTES**


---

**QUANTITY**


---

**DATE**

---

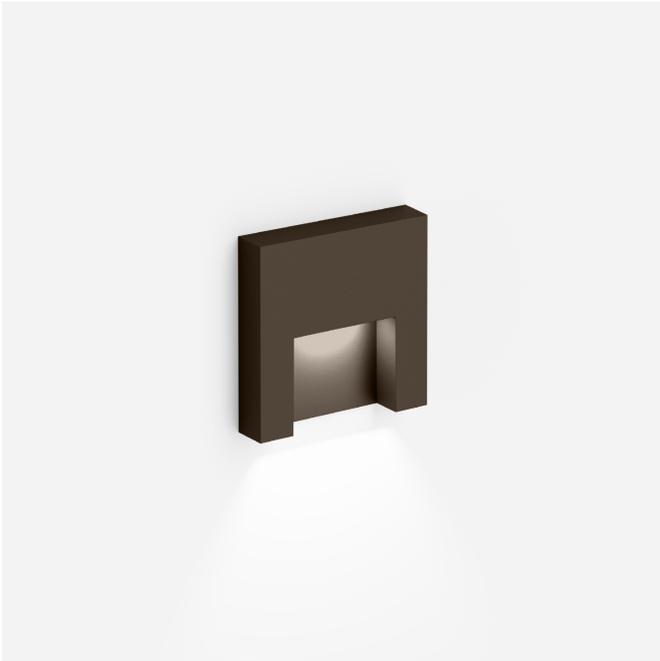

Square wall recessed luminaire made from aluminium; surface Bronze; powder coated; matt texture; RAL 075 30 10; recessed depth 40 mm; suitable for ceiling thickness of min. 12 mm; PCB 3-step binning; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90; degree of protection IP65; Class 3; driver not included; light source not replaceable;



**LUMINAIRE**

Wall  
 Recessed  
 Bronze  
 RAL 075 30 10 <sup>a</sup>  
 IP65  
 Exterior  
 76 lm

**LED Module**

3000 K  
 CRI ≥ 90  
 L80 / 50000h  
 ≤ 3 SDCM (initial MacAdam)

**Optical**

Asymetric  
 CIE flux code: 64 88 98 99 100

**Electrical**

excl. driver  
 24 V  
 Class III  
 Standard

**Physical**

length 80 mm  
 width 16 mm  
 height 80 mm  
 0.24 kg

**Cutout**


length 66 mm  
 width 66 mm  
 min. ceiling thickness 12 mm  
 recessed depth 40 mm

**datasheet.quicksum.material**

Aluminium

<sup>a</sup> Colour may deviate slightly due to production conditions

**LIGHT DISTRIBUTION**



[7451A2Q5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

7451A2Q5



**MOUNTING ACCESSORIES**

**Concrete Housing**

Type	Colour	Voltage	L·W·H (MM)	Item number
RETO 0.8			69-69-61	90012046

**Recessed Housing incl. plasterkit**

Type	Colour	Voltage	L·W·H (MM)	Item number
RETO 0.8			109-109-74	90012047

**ELECTRICAL ACCESSORIES**

**Driver**

Type	Colour	Voltage	L·W·H (MM)	Item number
35W   24V   IP67		24V	175-31-43	90212802
100W   24V   IP67		24V	178-68-39	90212903