




PROJECT

TYPE

NOTES

QUANTITY


DATE

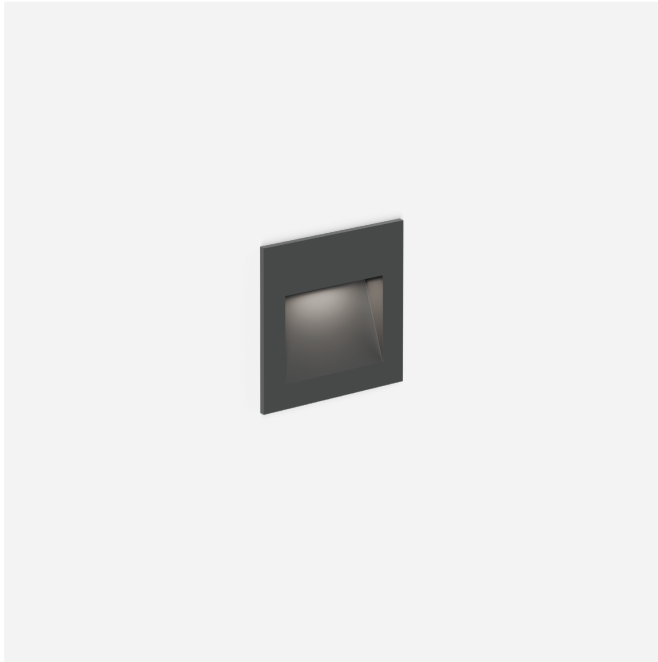

IP65



Rectangular wall recessed luminaire made from aluminium; surface Anthracite Grey; powder coated; matt texture; RAL 7016; recessed depth 40 mm; suitable for ceiling thickness of min. 12 mm; PCB 3-step binning; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; degree of protection IP65; Class 3; driver not included; light source not replaceable;



LUMINAIRE

Wall
Recessed
Anthracite Grey
RAL 7016^a
IP65
Exterior
44 / 75 lm

LED Module

3000 K
CRI ≥ 90
L70 / 60000h
 ≤ 3 SDCM (initial MacAdam)

Optical

Asymetric
CIE flux code: 41 77 91 85 100

Electrical

excl. driver
6 V
Class III

Physical



length 80 mm
width 33 mm
height 80 mm
0.16 kg

Cutout

length 66 mm
width 66 mm
min. ceiling thickness 12 mm
recessed depth 40 mm

^a Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION





MOUNTING ACCESSORIES

Concrete Housing

Type	Colour	Voltage	L·W·H (MM)	Item number
RETO 0.8			69-69-61	90012046

Recessed Housing incl. plasterkit

Type	Colour	Voltage	L·W·H (MM)	Item number
RETO 0.8			109-109-74	90012047

ELECTRICAL ACCESSORIES

Driver

Type	Colour	Voltage	L·W·H (MM)	Item number
4.2W 350mA 3-12V IP66		3-12V	38-29-23	90213101
7W 500mA 5-14.5V IP67		5-14.5V	57-41-24	90214301
7W 700mA 3-10.5V IP67		3-10.5V	57-41-24	90215301
4.2W 350mA 3-12V phase cut TE IP65		3-12V	44-27-20	90223302