




PROJECT

TYPE


NOTES

QUANTITY

DATE

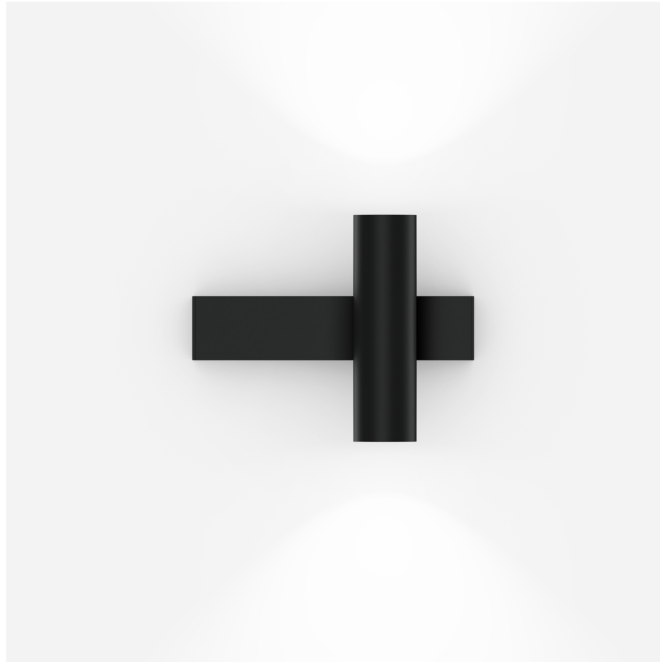

Wall surface luminaire made from die-cast aluminium; surface Black Matt; powder coated, matt texture; RAL 9011; up and down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; beam angle 31° ; degree of protection IP20; Class I; driver included; optional honeycomb louver available, to reduce glare; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



LUMINAIRE

Wall
Surface
Black Matt
RAL 9011^a
IP20
Interior
545 lm


LED Module

3000 K
CRI ≥ 90
L70 / 55000h
 ≤ 2 SDCM (initial MacAdam)

Optical

Medium (standard)
beam angle 31°
UGR ≤ 13
CIE flux code: 98 100 100 50 100
 $\geq 65^\circ < 1500 \text{ cd/m}^2$

LIGHT DISTRIBUTION



Electrical

phase-cut dim
220 - 240 V
system 7.7 W
Class I
Standard

Physical

diameter 35 mm
height 120 mm
0.28 kg

datasheet.quicksum.material

Aluminium

^a Colour may deviate slightly due to production conditions

376264B5



OPTICAL ACCESSORIES

Honeycomb Louver

Type

BLIEK petit | CENO | LECA | PIRRO | QITO

Colour

Black

Voltage

Ø (MM)

29

Item number

915230B0