

# CENO WALL 2.0

376264B3

## GENERAL

Wall , Surface

Black Matt

RAL 9005 <sup>a</sup>

IP20

Interior

Indirect 260 lm

Direct 260 lm

Total 520 lm

CIE flux code: 98 100 100 50 100

## LED

2700 K

CRI  $\geq 90$

L70 / 55000h

2 SDCM

## OPTICAL

Medium , Beam angle 31°

UGR < 13

$\geq 1500$  cd/m<sup>2</sup>

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 7.7 W

Class I

## PHYSICAL

Diameter 35 mm

Height 120 mm

0.28 kg

<sup>a</sup> Color may deviate slightly due to production conditions.


Project

Type


Notes

Quantity


Date

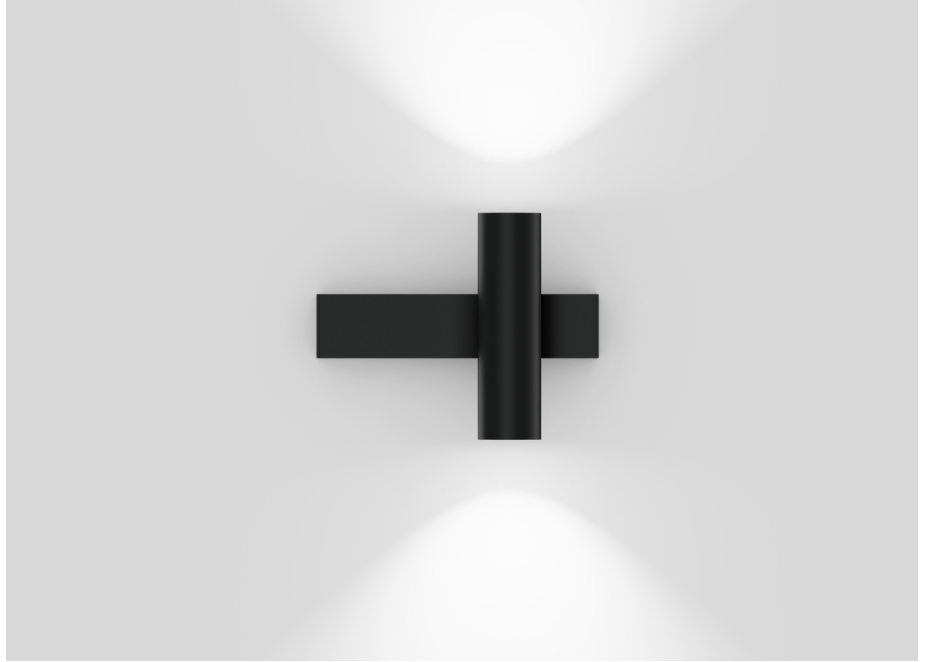

Wall surface luminaire made from die-cast aluminium; surface Black Matt; powder coated, matt texture; RAL 9005; up and down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; beam angle 31°; degree of protection IP20; PC1; driver included; optional honeycomb louver available, to reduce glare; light source replaceable by an authorized professional; control gear replaceable by end-user;



## LIGHT DISTRIBUTION





# CENO WALL 2.0

376264B3

## OPTICAL

### Honeycomb Louver

TYPE	Ø (MM)	ORDERCODE
BLIEK PETIT   CENO   LECA   PIRRO	29	9 0 0 5 1 1 3 1