




PROJECT

TYPE


NOTES

QUANTITY

DATE



Round wall surface luminaire made from aluminium; indirect light distribution; surface Black Matt + Champagne; powder coated; matt texture + wet painted; smooth semi glossy; No matching RAL; opal PMMA diffuser; PCB 3-step binning; phase-cut dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; driver included; optional spacer available for overlapping; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



LUMINAIRE

Wall

Surface

Black Matt + Champagne

No matching RAL

IP20

Interior

1180 lm

LED Module

2700 K

CRI ≥ 90

L80 / 50000h

≤ 3 SDCM (initial MacAdam)

1820 lm

162 lm/W^a

Optical

Opal

CIE flux code: 12 36 67 50 100

Electrical

phase-cut dim

220 - 240 V

system 13.2 W

Class I

Standard

Physical

length 400 mm

width 115 mm


height 400 mm

0.32 kg

datasheet.quicksum.material

Aluminium

^a Without electrical and optical losses

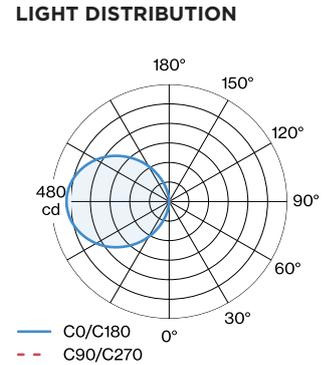

[371184CH3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.97	0.95	0.93	0.92
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

MOUNTING ACCESSORIES

Wall-/Base-Spacer

Type	Colour	Voltage	L·W·H (MM)	Item number
FINLIN ROUND	Black		52·30·23	900196B0