




PROJECT

TYPE


NOTES

QUANTITY

DATE

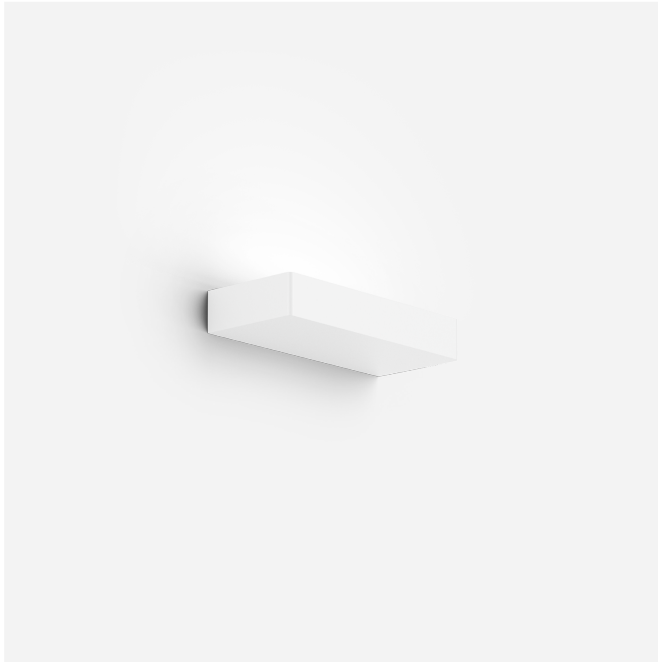

Wall surface luminaire made from aluminium; surface White Matt; powder coated; matt texture; RAL 9010; PCB 3-step binning; phase-cut dim; light colour 2700 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 80 ; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source not replaceable; control gear replaceable by end-user;



LUMINAIRE

Wall
Surface
White Matt
RAL 9010 ^a
IP20
Interior
1190 lm

LED Module

2700 K
CRI ≥ 80
L80 / 60000h
 ≤ 3 SDCM (initial MacAdam)
1188 lm
87 lm/W ^b

Optical

Asymmetric
CIE flux code: 37 64 82 0 100


Electrical

phase-cut dim
220 - 240 V
system 13.7 W
Class I

Physical

length 180 mm
width 78 mm
height 30 mm
0.69 kg

LIGHT DISTRIBUTION



^a Colour may deviate slightly due to production conditions

^b Without electrical and optical losses