




PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____



Pendant rod suspension made from aluminium; can be cut and adjusted as desired max. 1950 mm; for ceiling surface mounting; surface White Matt; powder coated, matt texture; RAL 9010; opal PMMA diffuser; PCB 3-step binning; phase-cut dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; CRI (Colour Rendering Index) ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

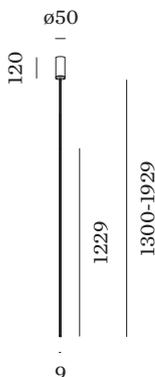

LUMINAIRE

Ceiling _____
 Surface _____
 White Matt _____
 RAL 9010 ^a _____
 IP20 _____
 Interior _____
 975 lm _____

LED Module

3000 K _____
 CRI ≥ 90 _____
 L80 / 50000h _____
 ≤ 3 SDCM (initial MacAdam) _____
 1310 lm _____
 178 lm/W ^b _____

Optical

Opal _____
 CIE flux code: 11 35 66 50 100 _____

Electrical

phase-cut dim _____
 220 - 240 V _____
 system 10.2 W _____
 Class I _____
 Standard _____

Physical


diameter 9 mm _____
 height 1300 mm _____
 0.44 kg _____

datasheet.quicksum.material

Aluminium _____

^a Colour may deviate slightly due to production conditions
^b Without electrical and optical losses

LIGHT DISTRIBUTION

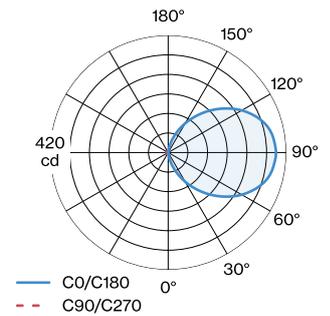



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.96	0.94	0.93	0.91
LSF	1	1	1	1	1

$MF = LMF \times RSMF \times LLMF \times LSF$

MF Maintenance Factor

LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor

LLMF Lamp Lumens Maintenance Factor

LSF Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

MOUNTING ACCESSORIES

FINLIN Cover Plate Adapter

Type	Colour	Voltage	Ø·H (MM)	Item number
for concrete housings	Black		100·3	900194B0