



WEVER & DUCRÉ
LIGHTING

PIRRO

petit SURFACE 6.0

129854WM5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling , Surface

White Matt + Champagne

IP20

Interior

Output: 1000 lm

CIE flux code: 98 100 100 100 100

LED

3000 K

CRI ≥ 90

L80 / 50000h

3 SDCM

OPTICAL

Medium , Beam angle 28°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 13.4 W

Class 1


PHYSICAL

Length 164 mm


Width 31 mm

Height 50 mm


0.21 kg

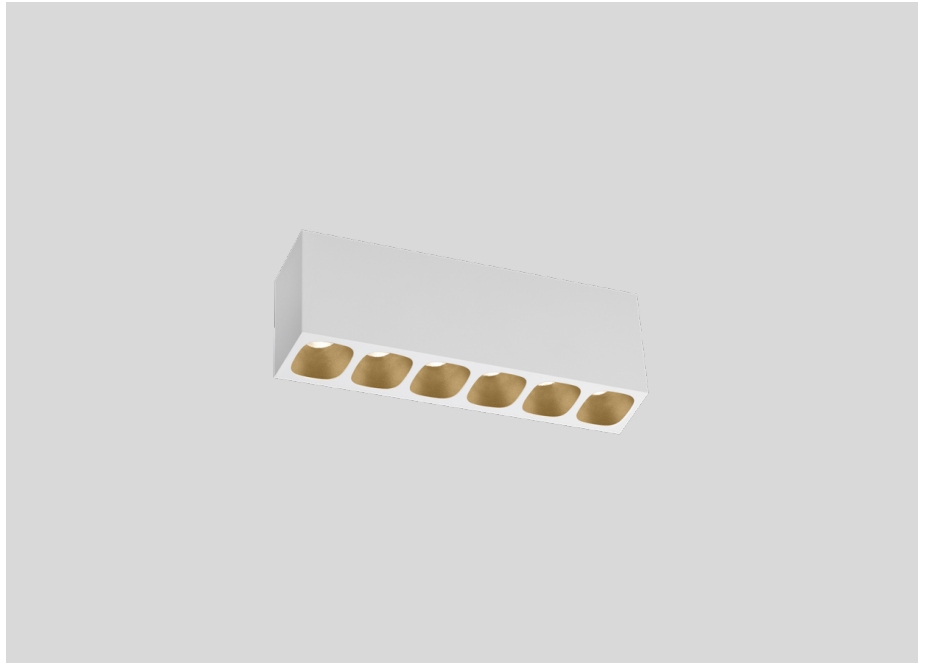

Rectangular ceiling surface mounted downlight made from die-cast aluminium; surface White Matt + Champagne; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; beam angle 28°; degree of protection IP20; PC1; UGR ≤ 13 ; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING


PIRRO

petit SURFACE 6.0

129854WM5

CONE DIAGRAM

medium 25°



h (m)	E0° (lx)	ø (m)
1	3880	0.45
2	970	0.90
3	430	1.35
4	240	1.81
5	160	2.26