



WEVER & DUCRÉ  
LIGHTING

# PIRRO

## petit SURFACE 6.0

129854E5

Project

Type

Notes

Quantity

Date

### GENERAL

Ceiling , Surface

White Matt + Black Matt

IP20

Interior

Output: 905 lm

CIE flux code: 98 100 100 100 100

### LED

3000 K

CRI  $\geq 90$

L80 / 50000h

3 SDCM

### OPTICAL

Medium , Beam angle 28°

### ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 13.4 W

Class 1



### PHYSICAL

Length 164 mm


Width 31 mm

Height 50 mm

0.21 kg

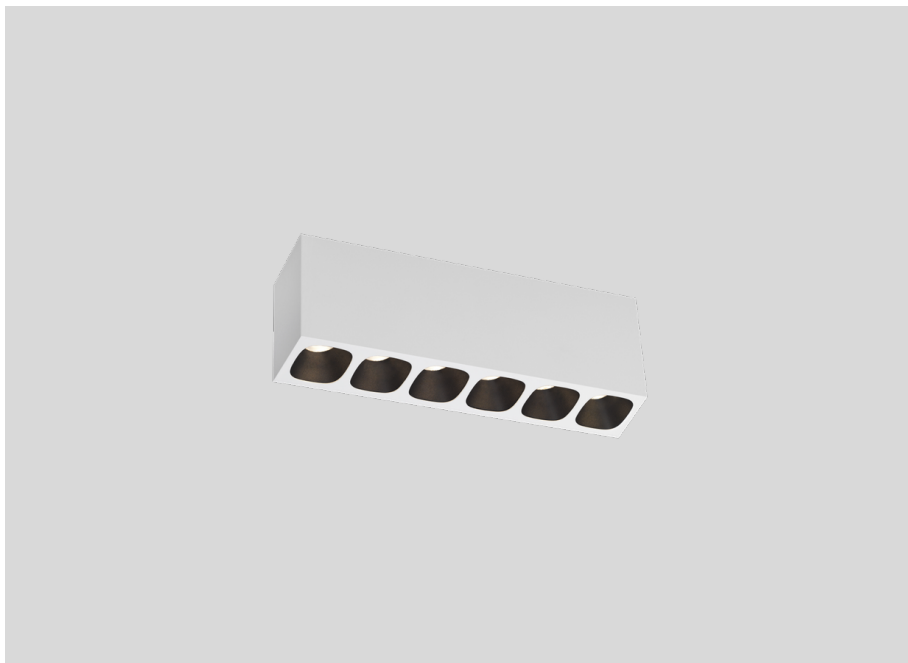

Rectangular ceiling surface mounted downlight made from die-cast aluminium; surface White Matt + Black Matt; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; beam angle 28°; degree of protection IP20; PC1; UGR  $\leq 13$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 3000$  cd/m<sup>2</sup>; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;




PIRRO

petit SURFACE 6.0

129854E5

LIGHT DISTRIBUTION



CONE DIAGRAM

medium 25°

h (m)	E0° (lx)	ø (m)
1	3510	0.45
2	880	0.90
3	390	1.35
4	220	1.81
5	140	2.26