



WEVER & DUCRÉ
LIGHTING

PIRRO petit 6.0

129351E3

GENERAL

Ceiling , Recessed

White Matt + Black Matt

IP20

IC rated

Interior

Output: 870 lm

CIE flux code: 98 100 100 100 100

LED

2700 K

CRI ≥ 90

L80 / 50000h

3 SDCM

OPTICAL

Medium , Beam angle 28°

ELECTRICAL

excl. driver

36 V

LED Inset 11.4 W

Class 3

350 mA

PHYSICAL

Length 172 mm

Width 40 mm

Height 40 mm

0.15 kg

wire springs

CUTOUT

Length 168 mm

Width 33 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 25 mm

Recessed depth 60 mm



Project

Type


Notes

Quantity

Date

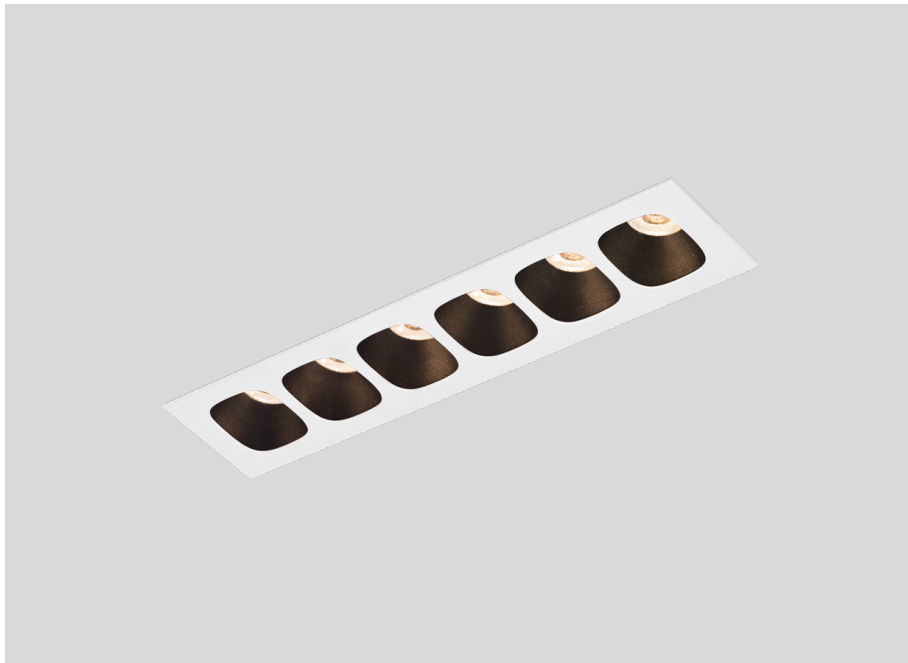

Rectangular ceiling recessed downlight made from die-cast aluminium; surface White Matt + Black Matt; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 60 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; beam angle 28°; degree of protection IP20; PC3; IC rated; UGR ≤ 13 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; driver not included; light source replaceable by an authorized professional;




PIRRO

petit 6.0

129351E3

LIGHT DISTRIBUTION



CONE DIAGRAM

medium 25°

h (m)	E0° (lx)	ø (m)
1	3370	0.45
2	840	0.90
3	370	1.35
4	210	1.81
5	130	2.26

ELECTRICAL

Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
15W 350 mA 27-42V phase-cut dim	102 · 49 · 29	27-42V	9 0 2 2 3 4 0 3
14.7W 350mA 26-42V	122 · 41 · 23	26-42V	9 0 2 2 3 5 0 4