



WEVER & DUCRÉ  
LIGHTING

# PIRRO petit 6.0

129351CH3

Project

Type

Notes

Quantity

Date

## GENERAL

Ceiling , Recessed

Black Matt + Champagne

IP20

IC rated

Interior

Output: 960 lm

CIE flux code: 98 100 100 100 100

## LED

2700 K

CRI  $\geq 90$

L80 / 50000h

3 SDCM

## OPTICAL

Medium , Beam angle 28°

## ELECTRICAL

excl. driver

36 V

LED Inset 11.4 W

Class 3

350 mA

## PHYSICAL

Length 172 mm

Width 40 mm

Height 40 mm

0.15 kg

wire springs

## CUTOUT



Length 168 mm

Width 33 mm


Min. ceiling thickness 4 mm

Max. ceiling thickness 25 mm


Recessed depth 60 mm

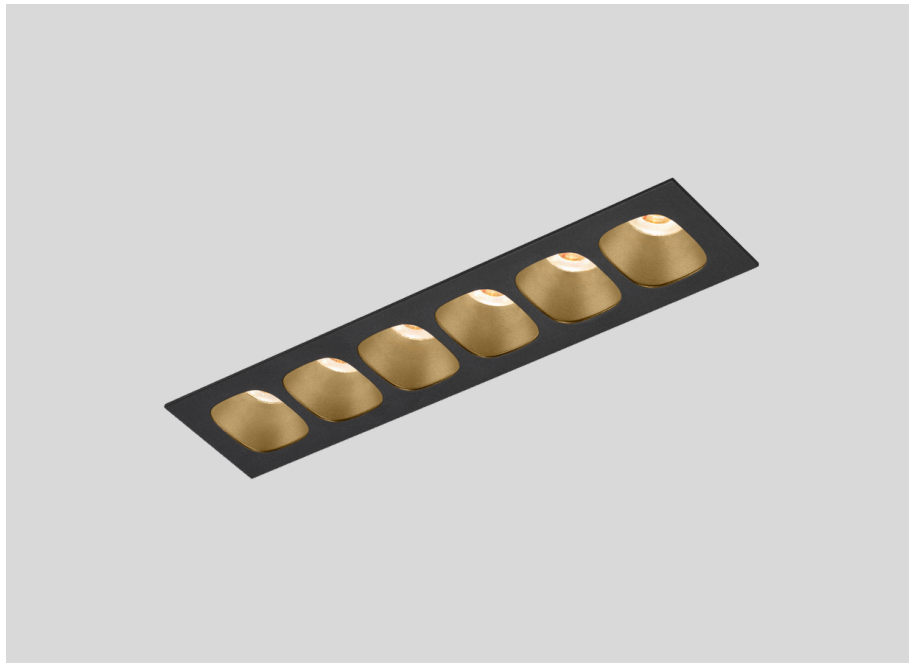

Rectangular ceiling recessed downlight made from die-cast aluminium; surface Black Matt + Champagne; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 60 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; beam angle 28°; degree of protection IP20; PC3; IC rated; UGR  $\leq 13$ ; driver not included; light source replaceable by an authorized professional;



## LIGHT DISTRIBUTION



[129351CH3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.  
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · [www.weverducre.com](http://www.weverducre.com)

May 8, 2024

PIRRO

petit 6.0

129351CH3

CONE DIAGRAM

medium 25°

h (m)	E0° (lx)	ø (m)
1	3730	0.45
2	930	0.90
3	410	1.35
4	230	1.81
5	150	2.26

ELECTRICAL

Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
15W   350 mA   27-42V   phase-cut dim	102 · 49 · 29	27-42V	9 0 2 2 3 4 0 3
14.7W   350mA   26-42V	122 · 41 · 23	26-42V	9 0 2 2 3 5 0 4