




PROJECT

TYPE


NOTES

QUANTITY

DATE

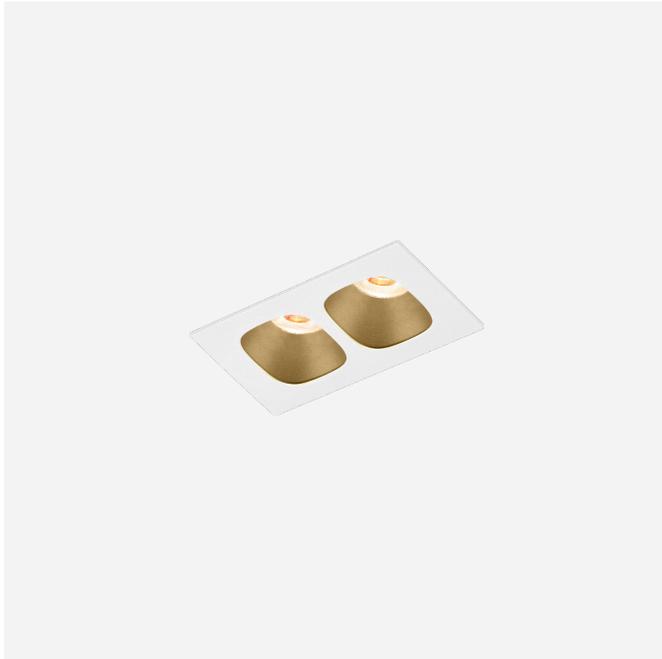

Rectangular ceiling recessed downlight made from die-cast aluminium; surface White Matt + Champagne; RAL 9010 + No matching RAL; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 60 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; beam angle 28°; degree of protection IP20; Class 3; IC rated; UGR ≤ 13 ; driver not included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



LUMINAIRE

Ceiling
 Recessed
 White Matt + Champagne
 RAL 9010 + No matching RAL
 a
 IP20
 IC rated
 Interior
 335 lm

LED Module

3000 K
 CRI ≥ 90
 L80 / 50000h
 ≤ 3 SDCM (initial MacAdam)

Optical

Medium (standard)
 beam angle 28°
 CIE flux code: 98 100 100 100
 100

Electrical

excl. driver
 12 V
 Class III
 Standard

Physical

length 66 mm
 width 40 mm
 height 40 mm
 0.07 kg
 wire springs

Cutout


length 64 mm
 width 33 mm
 min. ceiling thickness 4 mm
 max. ceiling thickness 25 mm
 recessed depth 60 mm

datasheet.quicksum.material

Aluminium

^a Colour may deviate slightly due to production conditions

LIGHT DISTRIBUTION

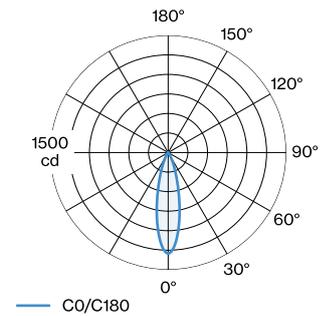

[129151WM5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



CONE DIAGRAM

medium (standard) 25°

h (m)	E0° (lx)	ø (m)
1	1290	0.45
2	320	0.90
3	140	1.35
4	80	1.81
5	50	2.26

ELECTRICAL ACCESSORIES

Driver

Type	Colour	Voltage	L·W·H (MM)	Item number
4.5W 350 mA 8-12V phase-cut dim IP44		8-12V	49-30-20	90223101
14W 350mA 10-40V DALI-2 push dim		10-40V	166-29-21	90243502

[129151WM5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.