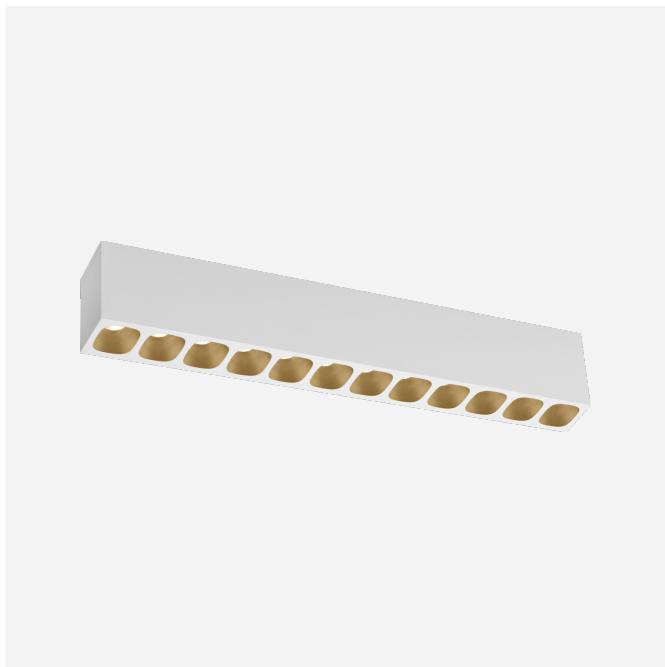
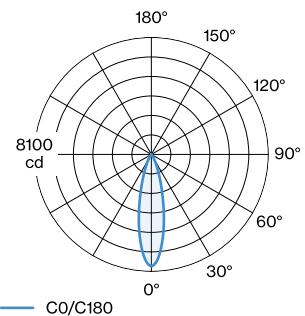



PROJECT
TYPE
NOTES
QUANTITY
DATE


Rectangular ceiling surface mounted downlight made from die-cast aluminium; surface White Matt + Champagne; RAL 9010; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; beam angle 28°; degree of protection IP20; Class 1; UGR ≤ 13 ; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

LUMINAIRE

Ceiling
Surface
White Matt + Champagne
RAL 9010 ^a
IP20
Interior
2000 lm

LIGHT DISTRIBUTION

LED Module

3000 K
CRI ≥ 90
L80 / 50000h
 ≤ 3 SDCM (initial MacAdam)

Optical

Medium (standard)
beam angle 28°
CIE flux code: 98 100 100 100
100


Electrical

phase-cut dim
220 - 240 V
system 26.8 W
Class I

Physical

length 322 mm
width 31 mm
height 50 mm
0.56 kg

^a Colour may deviate slightly due to production conditions



**CONE DIAGRAM**

medium (standard) 25°

h (m)	E0° (lx)	ø (m)
1	7750	0.45
2	1940	0.90
3	860	1.35
4	480	1.81
5	310	2.26