



WEVER & DUCRÉ
LIGHTING

PIRRO

petit SURFACE 12.0

129954CH5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling , Surface

Black Matt + Champagne

IP20

Interior

Output: 2000 lm

CIE flux code: 98 100 100 100 100

LED

3000 K

CRI ≥ 90

L80 / 50000h

3 SDCM

OPTICAL

Medium , Beam angle 28°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 26.8 W

Class 1


PHYSICAL

Length 322 mm


Width 31 mm

Height 50 mm


0.38 kg

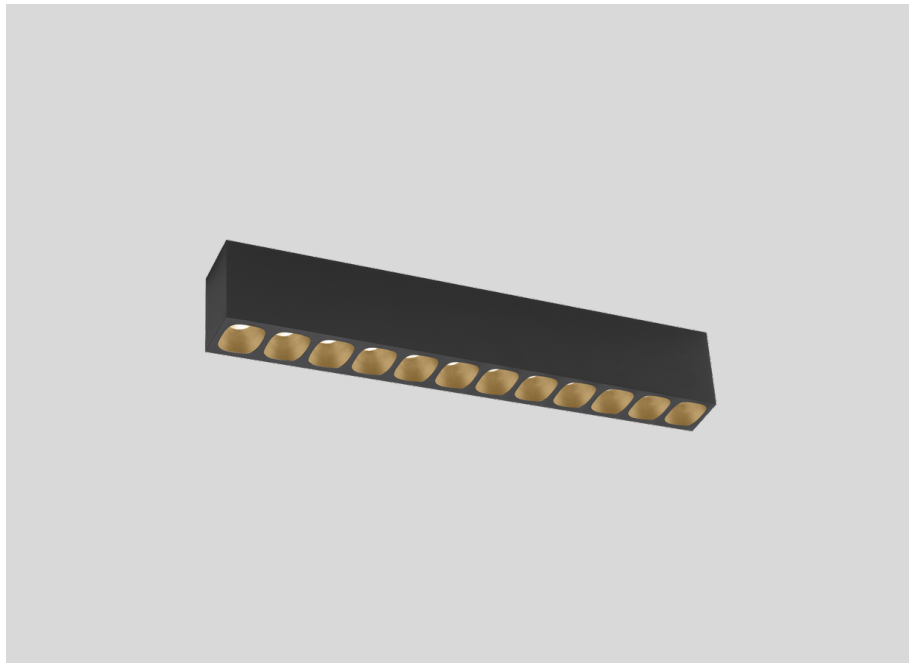

Rectangular ceiling surface mounted downlight made from die-cast aluminium; surface Black Matt + Champagne; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; beam angle 28°; degree of protection IP20; PC1; UGR ≤ 13 ; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

PIRRO

petit SURFACE 12.0

129954CH5

CONE DIAGRAM

medium 25°

h (m)	E0° (lx)	ø (m)
1	7750	0.45
2	1940	0.90
3	860	1.35
4	480	1.81
5	310	2.26