




PROJECT

TYPE

NOTES

QUANTITY

DATE

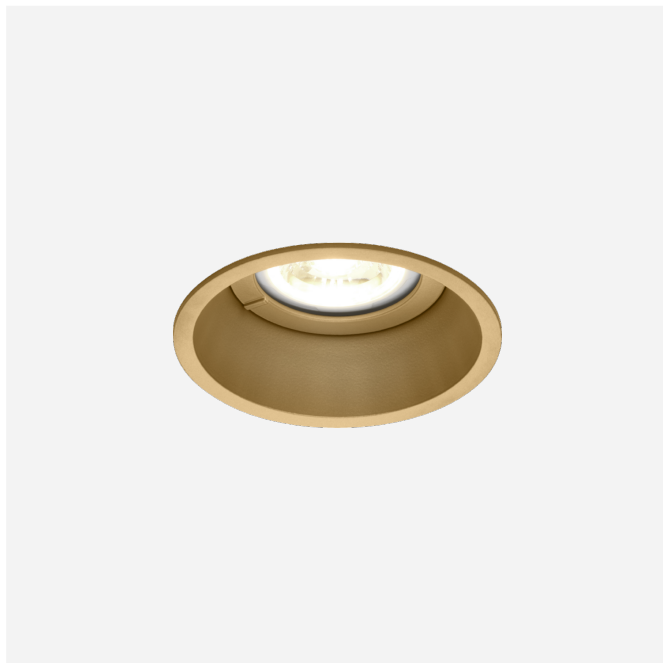

Round ceiling recessed downlight made from die-cast aluminium; surface Champagne; wet painted, smooth semi glossy; No matching RAL; installation without tools using wire springs; suitable for ceiling thickness of 4-27 mm; recessed depth 115mm; lamp socket GU10; lamp type PAR16; max. 12W; 100 - 240 V; degree of protection IP20; Class 2; lamp not included;



LUMINAIRE

Ceiling
Recessed
Champagne
No matching RAL
IP20
Interior

LAMP

lamp PAR16
socket GU10
max. per socket 12.0 W
CRI ≥ 90

OPTICAL

UGR ≤ 16

ELECTRICAL

100 - 240 V
Class II

PHYSICAL

diameter 84 mm
height 108 mm
0.12 kg
wire springs

CUTOUT



diameter 76-79 mm
min. ceiling thickness 4 mm
max. ceiling thickness 27 mm
recessed depth 115 mm

MEASURED LAMPS

PAR16 LAMP 3000K CRI90
470 lm

PAR16 LAMP 2700K CRI90
450 lm

LIGHT DISTRIBUTION





ELECTRICAL ACCESSORIES

LED LAMPS

TYPE	COLOUR	VOLTAGE	ITEM NUMBER
	Black Texture		W901228B3
	Black Texture		W901228B5

LAMPS

PAR16 LED LAMP

TYPE	COLOUR	VOLTAGE	Ø·H (MM)	ITEM NUMBER
2700K >90 CRI GU10 220-240VAC	White		50-60	901228W3
3000K >90 CRI GU10 220-240VAC	White		50-60	901228W5
2700K >80 CRI GU10 220-240VAC	Silver		50-55	905227S2
3000K >80 CRI GU10 220-240VAC	Silver		50-55	905227S4
2700K CRI >90 GU10 90-240VAC	Black		50-60	908228B3
3000K CRI >90 GU10 90-240VAC	Black		50-60	908228B5
2700K CRI >90 GU10 90-240VAC	White		50-60	908228W3
3000K CRI >90 GU10 90-240VAC	White		50-60	908228W5