




**PROJECT** \_\_\_\_\_

**TYPE** \_\_\_\_\_

**NOTES** \_\_\_\_\_

**QUANTITY** \_\_\_\_\_

**DATE** \_\_\_\_\_

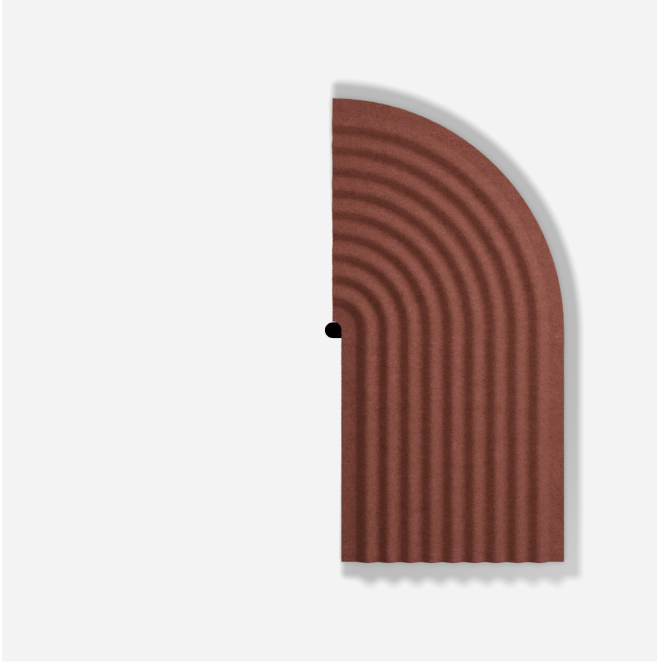

**General**

Wall \_\_\_\_\_  
 Surface \_\_\_\_\_  
 Felt Oxide Red \_\_\_\_\_  
 No matching RAL \_\_\_\_\_  
 Interior \_\_\_\_\_

**Optical**

Indirect \_\_\_\_\_

**Electrical**

Standard \_\_\_\_\_


**Physical**

length 325 mm \_\_\_\_\_  
 width 650 mm \_\_\_\_\_  
 height 40 mm \_\_\_\_\_  
 0.94 kg \_\_\_\_\_

**datasheet.quicksum.material**

Recycled PET Felt \_\_\_\_\_

Acoustic element made of high quality PET felt with sound absorbing properties; 100% recyclable; for wall surface mounting; surface Felt Oxide Red; No matching RAL;



[‘336300FO’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.